



3 Volt Intel StrataFlash[®] Memory

28F128J3, 28F640J3, 28F320J3 (x8/x16)

Datasheet

Product Features

- **Performance**
 - 110/120/150 ns Initial Access Speed for 32/64/128 Mbit Densities
 - 25 ns Asynchronous Page-Mode Reads
 - 32-Byte Write Buffer
 - 6.8 μ s per Byte Effective Programming Time
- **Software**
 - Program and Erase suspend support
 - Flash Data Integrator (FDI), Common Flash Interface (CFI) Compatible
- **Security**
 - 128-bit Protection Register
 - 64-bit Unique Device Identifier
 - 64-bit User Programmable OTP Cells
 - Absolute Protection with $V_{PEN} = GND$
 - Individual Block Locking
 - Block Erase/Program Lockout during Power Transitions
- **Architecture**
 - Multi-Level Cell Technology: High Density at Low Cost
 - High-Density Symmetrical 128-Kbyte Blocks
 - 128 Mbit (128 Blocks)
 - 64 Mbit (64 Blocks)
 - 32 Mbit (32 Blocks)
- **Quality and Reliability**
 - Operating Temperature: -40 °C to +85 °C
 - 100K Minimum Erase Cycles per Block
 - 0.18 μ m ETOX[™] VII Process (J3C)
 - 0.25 μ m ETOX[™] VI Process (J3A)
- **Packaging and Voltage**
 - 56-Lead TSOP Package
 - 64-Ball Intel[®] Easy BGA Package
 - 48-Ball Intel[®] VF BGA Package (32 and 64 Mbit) (x16 only)
 - $V_{CC} = 2.7 V - 3.6 V$
 - $V_{CCQ} = 2.7 V - 3.6 V$

Capitalizing on Intel's 0.25 and 0.18 micron, two-bit-per-cell technology, 3 Volt Intel StrataFlash[®] Memory products provide 2X the bits in 1X the space, with new features for mainstream performance. Offered in 128-Mbit (16-Mbyte), 64-Mbit, and 32-Mbit densities, these devices bring reliable, two-bit-per-cell storage technology to the flash market segment.

Benefits include: more density in less space, high-speed interface, lowest cost-per-bit NOR devices, support for code and data storage, and easy migration to future devices.

Using the same NOR-based ETOX[™] technology as Intel's one-bit-per-cell products, Intel StrataFlash memory devices take advantage of over one billion units of Flash manufacturing experience since 1987. As a result, Intel StrataFlash components are ideal for code and data applications where high density and low cost are required. Examples include networking, telecommunications, digital set top boxes, audio recording, and digital imaging.

By applying FlashFile[™] memory family pinouts, Intel StrataFlash memory components allow easy design migrations from existing Word-Wide FlashFile memory (28F160S3 and 28F320S3), and first generation Intel StrataFlash memory (28F640J5 and 28F320J5) devices.

Intel StrataFlash memory components deliver a new generation of forward-compatible software support. By using the Common Flash Interface (CFI) and the Scalable Command Set (SCS), customers can take advantage of density upgrades and optimized write capabilities of future Intel StrataFlash memory devices. Manufactured on Intel[®] 0.18 micron ETOX[™] VII (J3C) and 0.25 micron ETOX[™] VI (J3A) process technology, Intel StrataFlash memory provides the highest levels of quality and reliability.

Notice: This document contains information on new products in production. The specifications are subject to change without notice. Verify with your local Intel sales office that you have the latest datasheet before finalizing a design.

Order Number: 290667-012
December 2002



INFORMATION IN THIS DOCUMENT IS PROVIDED IN CONNECTION WITH INTEL® PRODUCTS. NO LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT. EXCEPT AS PROVIDED IN INTEL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, INTEL ASSUMES NO LIABILITY WHATSOEVER, AND INTEL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY, RELATING TO SALE AND/OR USE OF INTEL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. Intel products are not intended for use in medical, life saving, or life sustaining applications.

Intel may make changes to specifications and product descriptions at any time, without notice.

Designers must not rely on the absence or characteristics of any features or instructions marked "reserved" or "undefined." Intel reserves these for future definition and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to them.

The 3 Volt Intel StrataFlash® Memory may contain design defects or errors known as errata which may cause the product to deviate from published specifications. Current characterized errata are available on request.

Contact your local Intel sales office or your distributor to obtain the latest specifications and before placing your product order.

Copies of documents which have an ordering number and are referenced in this document, or other Intel literature may be obtained by calling 1-800-548-4725 or by visiting Intel's website at <http://www.intel.com>.

Copyright © 2002, Intel Corporation. All rights reserved.

Intel and ETOX are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries.

*Other names and brands may be claimed as the property of others.

Contents

| | | |
|------------|-------------------------------------|----|
| 1.0 | Introduction | 7 |
| 1.1 | Document Purpose | 7 |
| 1.2 | Nomenclature | 7 |
| 1.3 | Conventions | 7 |
| 2.0 | Device Description | 8 |
| 2.1 | Product Overview | 8 |
| 2.2 | Ballout Diagrams | 9 |
| 2.3 | Signal Descriptions | 12 |
| 2.4 | Block Diagram | 13 |
| 2.5 | Memory Map | 14 |
| 3.0 | Device Operations | 15 |
| 3.1 | Bus Operations | 15 |
| 3.1.1 | Read Mode | 16 |
| 3.1.2 | Write | 16 |
| 3.1.3 | Output Disable | 16 |
| 3.1.4 | Standby | 17 |
| 3.1.5 | Reset/Power-Down | 17 |
| 3.2 | Device Commands | 17 |
| 4.0 | Read Operations | 19 |
| 4.1 | Read Array | 19 |
| 4.1.1 | Asynchronous Page-Mode Read | 19 |
| 4.2 | Read Identifier Codes | 19 |
| 4.3 | Read Status Register | 20 |
| 4.4 | Read Query/CFI | 22 |
| 5.0 | Programming Operations | 22 |
| 5.1 | Byte/Word Program | 22 |
| 5.2 | Write to Buffer | 22 |
| 5.3 | Program Suspend | 23 |
| 5.4 | Program Resume | 24 |
| 6.0 | Erase Operations | 24 |
| 6.1 | Block Erase | 24 |
| 6.2 | Block Erase Suspend | 24 |
| 6.3 | Erase Resume | 25 |
| 7.0 | Security Modes | 26 |
| 7.1 | Set Block Lock-Bit | 26 |
| 7.2 | Clear Block Lock-Bits | 26 |
| 7.3 | Protection Register Program | 27 |
| 7.3.1 | Reading the Protection Register | 27 |
| 7.3.2 | Programming the Protection Register | 27 |
| 7.3.3 | Locking the Protection Register | 27 |
| 7.4 | Array Protection | 30 |

| | | |
|-------------------|---|----|
| 8.0 | Special Modes | 30 |
| 8.1 | Set Read Configuration | 30 |
| 8.1.1 | Read Configuration..... | 30 |
| 8.2 | STS..... | 30 |
| 9.0 | Power and Reset | 32 |
| 9.1 | Power-Up/Down Characteristics..... | 32 |
| 9.2 | Power Supply Decoupling..... | 32 |
| 9.3 | Reset Characteristics..... | 32 |
| 10.0 | Electrical Specifications | 33 |
| 10.1 | Absolute Maximum Ratings..... | 33 |
| 10.2 | Operating Conditions..... | 34 |
| 10.3 | DC Current Characteristics..... | 35 |
| 10.4 | DC Voltage Characteristics..... | 36 |
| 11.0 | AC Characteristics | 37 |
| 11.1 | Read Operations..... | 37 |
| 11.2 | Write Operations..... | 39 |
| 11.3 | Block Erase, Program, and Lock-Bit Configuration Performance..... | 40 |
| 11.4 | Reset Operation..... | 42 |
| 11.5 | AC Test Conditions..... | 42 |
| 11.6 | Capacitance..... | 43 |
| Appendix A | Write State Machine (WSM) | 44 |
| Appendix B | Common Flash Interface | 45 |
| Appendix C | Flow Charts | 52 |
| Appendix D | Mechanical Information | 61 |
| Appendix E | Design Considerations | 64 |
| Appendix F | Additional Information | 66 |
| Appendix G | Ordering Information | 67 |

Revision History

| Date of Revision | Version | Description |
|------------------|---------|--|
| 07/07/99 | -001 | Original Version |
| 08/03/99 | -002 | A ₀ –A ₂ indicated on block diagram |
| 09/07/99 | -003 | Changed Minimum Block Erase time, I _{OL} , I _{OH} , Page Mode and Byte Mode currents. Modified RP# on AC Waveform for Write Operations |
| 12/16/99 | -004 | Changed Block Erase time and t _{AVWH} Removed all references to 5 V I/O operation Corrected <i>Ordering Information</i> , Valid Combinations entries Changed Min program time to 211 μs Added DU to Lead Descriptions table Changed Chip Scale Package to Ball Grid Array Package Changed default read mode to page mode Removed erase queuing from Figure 10, <i>Block Erase Flowchart</i> |
| 03/16/00 | -005 | Added Program Max time Added Erase Max time Added Max page mode read current Moved tables to correspond with sections Fixed typographical errors in ordering information and DC parameter table Removed V _{CCQ1} setting and changed V _{CCQ2/3} to V _{CCQ1/2} Added recommended resistor value for STS pin Change operation temperature range Removed note that rp# could go to 14 V Removed V _{OL} of 0.45 V; Removed V _{OH} of 2.4 V Updated I _{CCR} Typ values Added Max lock-bit program and lock times Added note on max measurements |
| 06/26/00 | -006 | Updated cover sheet statement of 700 million units to one billion Corrected Table 10 to show correct maximum program times Corrected error in Max block program time in section 6.7 Corrected typical erase time in section 6.7 |
| 2/15/01 | -007 | Updated cover page to reflect 100K minimum erase cycles Updated cover page to reflect 110 ns 32M read speed Removed Set Read Configuration command from Table 4 Updated Table 8 to reflect reserved bits are 1-7; not 2-7 Updated Table 16 bit 2 definition from R to PSS Changed V _{PENLK} Max voltage from 0.8 V to 2.0 V, Section 6.4, <i>DC Characteristics</i> Updated 32Mbit Read Parameters R1, R2 and R3 to reflect 110ns, Section 6.5, <i>AC Characteristics–Read-Only Operations</i> ^(1,2) Updated write parameter W13 (t _{WHRL}) from 90 ns to 500 ns, Section 6.6, <i>AC Characteristics–Write Operations</i> Updated Max. Program Suspend Latency W16 (t _{WHRH1}) from 30 to 75 μs, Section 6.7, <i>Block Erase, Program, and Lock-Bit Configuration Performance</i> ^(1,2,3) |
| 04/13/01 | -008 | Revised Section 7.0, <i>Ordering Information</i> |

| Date of Revision | Version | Description |
|------------------|---------|--|
| 07/27/01 | -009 | Added Figure 4, 3 Volt Intel StrataFlash® Memory VF BGA Package (32 Mbit) Added Figure 5, 3 Volt Intel StrataFlash® Memory VF BGA Mechanical Specifications Updated Operating Temperature Range to Extended (Section 6.1 and Table 22) Reduced t_{EHQZ} to 35 ns. Reduced t_{WHEH} to 0 ns Added parameter values for -40 °C operation to Lock-Bit and Suspend Latency Updated V_{LKO} and V_{PENLK} to 2.2 V Removed Note #4, Section 6.4 and Section 6.6 Minor text edits |
| 10/31/01 | -010 | Added notes under lead descriptions for VF BGA Package Removed 3.0 V - 3.6 V V_{cc} , and V_{ccq} columns under AC Characteristics Removed byte mode read current row un DC characteristics Added ordering information for VF BGA Package Minor text edits |
| 03/21/02 | -011 | Changed datasheet to reflect the best known methods Updated max value for Clear Block Lock-Bits time Minor text edits |
| 12/12/02 | -012 | Added nomenclature for J3C (0.18 μ m) devices. |

1.0 Introduction

1.1 Document Purpose

This document contains information pertaining to the 3 Volt Intel StrataFlash[®] Memory device, J3. The purpose of this document is to facilitate the use of this product and describe the features, operations, and specifications of this device.

1.2 Nomenclature

| | |
|-------------------------|---|
| AMIN: | AMIN = A0 for x8 AMIN = A1 for x16 |
| AMAX: | 32 Mbit AMAX = A21 64 Mbit AMAX = A22 128 Mbit AMAX = A23 |
| Block: | A group of flash cells that share common erase circuitry and erase simultaneously |
| Clear: | Indicates a logic zero (0) |
| CUI: | Command User Interface |
| MLC: | Multi-Level Cell |
| OTP: | One Time Programmable |
| PLR: | Protection Lock Register |
| PR: | Protection Register |
| PRD | Protection Register Data |
| Program: | To write data to the flash array |
| RCR: | Read Configuration Register |
| RFU: | Reserved for Future Use |
| Set: | Indicates a logic one (1) |
| SR: | Status Register |
| SRD | Status Register Data |
| VPEN: | Refers to a signal or package connection name |
| V_{PEN}: | Refers to timing or voltage levels |
| WSM: | Write State Machine |
| XSR | eXtended Status Register |

1.3 Conventions

| | |
|------------------|--------------------|
| 0x: | Hexadecimal prefix |
| 0b: | Binary prefix |
| k (noun): | 1,000 |
| M (noun): | 1,000,000 |
| Nibble | 4 bits |
| Byte: | 8 bits |
| Word: | 16 bits |
| Kword: | 1,024 words |
| Kb: | 1,024 bits |
| KB: | 1,024 bytes |
| Mb: | 1,048,576 bits |
| MB: | 1,048,576 bytes |

Brackets: Square brackets ([]) will be used to designate group membership or to define a group of signals with similar function (i.e. A[21:1], SR[4,1] and D[15:0]).

2.0 Device Description

2.1 Product Overview

The 3 Volt Intel StrataFlash[®] memory family contains high-density memories organized as 16 Mbytes or 8 Mwords (128-Mbit), 8 Mbytes or 4 Mwords (64-Mbit), and 4 Mbytes or 2 Mwords (32-Mbit). These devices can be accessed as 8- or 16-bit words. The 128-Mbit device is organized as one-hundred-twenty-eight 128-Kbyte (131,072 bytes) erase blocks. The 64-Mbit device is organized as sixty-four 128-Kbyte erase blocks while the 32-Mbit device contains thirty-two 128-Kbyte erase blocks. Blocks are selectively and individually lockable in-system. A 128-bit protection register has multiple uses, including unique flash device identification.

The device's optimized architecture and interface dramatically increases read performance by supporting page-mode reads. This read mode is ideal for non-clock memory systems.

A Common Flash Interface (CFI) permits software algorithms to be used for entire families of devices. This allows device-independent, JEDEC ID-independent, and forward- and backward-compatible software support for the specified flash device families. Flash vendors can standardize their existing interfaces for long-term compatibility.

Scalable Command Set (SCS) allows a single, simple software driver in all host systems to work with all SCS-compliant flash memory devices, independent of system-level packaging (e.g., memory card, SIMM, or direct-to-board placement). Additionally, SCS provides the highest system/device data transfer rates and minimizes device and system-level implementation costs.

A Command User Interface (CUI) serves as the interface between the system processor and internal operation of the device. A valid command sequence written to the CUI initiates device automation. An internal Write State Machine (WSM) automatically executes the algorithms and timings necessary for block erase, program, and lock-bit configuration operations.

A block erase operation erases one of the device's 128-Kbyte blocks typically within one second— independent of other blocks. Each block can be independently erased 100,000 times. Block erase suspend mode allows system software to suspend block erase to read or program data from any other block. Similarly, program suspend allows system software to suspend programming (byte/word program and write-to-buffer operations) to read data or execute code from any other block that is not being suspended.

Each device incorporates a Write Buffer of 32 bytes (16 words) to allow optimum programming performance. By using the Write Buffer, data is programmed in buffer increments. This feature can improve system program performance more than 20 times over non-Write Buffer writes.

Individual block locking uses block lock-bits to lock and unlock blocks. Block lock-bits gate block erase and program operations. Lock-bit configuration operations set and clear lock-bits (Set Block Lock-Bit and Clear Block Lock-Bits commands).

The Status Register indicates when the WSM's block erase, program, or lock-bit configuration operation is finished.

The STS (STATUS) output gives an additional indicator of WSM activity by providing both a hardware signal of status (versus software polling) and status masking (interrupt masking for background block erase, for example). Status indication using STS minimizes both CPU overhead and system power consumption. When configured in level mode (default mode), it acts as a RY/BY# signal. When low, STS indicates that the WSM is performing a block erase, program, or lock-bit configuration. STS-high indicates that the WSM is ready for a new command, block erase is suspended (and programming is inactive), program is suspended, or the device is in reset/power-down mode. Additionally, the configuration command allows the STS signal to be configured to pulse on completion of programming and/or block erases.

Three CE signals are used to enable and disable the device. A unique CE logic design (see Table 3, “Chip Enable Truth Table” on page 16) reduces decoder logic typically required for multi-chip designs. External logic is not required when designing a single chip, a dual chip, or a 4-chip miniature card or SIMM module.


The BYTE# signal allows either x8 or x16 read/writes to the device. BYTE# at logic low selects 8-bit mode; address A0 selects between the low byte and high byte. BYTE# at logic high enables 16-bit operation; address A1 becomes the lowest order address and address A0 is not used (don't care). A device block diagram is shown in Figure 4 on page 14.

When the device is disabled (see Table 3 on page 16) and the RP# signal is at V_{CC} , the standby mode is enabled. When the RP# signal is at GND, a further power-down mode is enabled which minimizes power consumption and provides write protection during reset. A reset time (t_{PHQV}) is required from RP# switching high until outputs are valid. Likewise, the device has a wake time (t_{PHWL}) from RP#-high until writes to the CUI are recognized. With RP# at GND, the WSM is reset and the Status Register is cleared.

2.2 Ballout Diagrams

Intel StrataFlash® Memory is available in three package types. Easy BGA in a 64-ball configuration, along with 56-lead TSOP (Thin Small Outline Package), support all offered densities. A 48-ball VF BGA package supporting the 32 and 64 Mbit device is also supported. Figure 1, Figure 2, and Figure 3 show the pinouts.


Figure 1. 3 Volt Intel StrataFlash® Memory Easy BGA Ballout

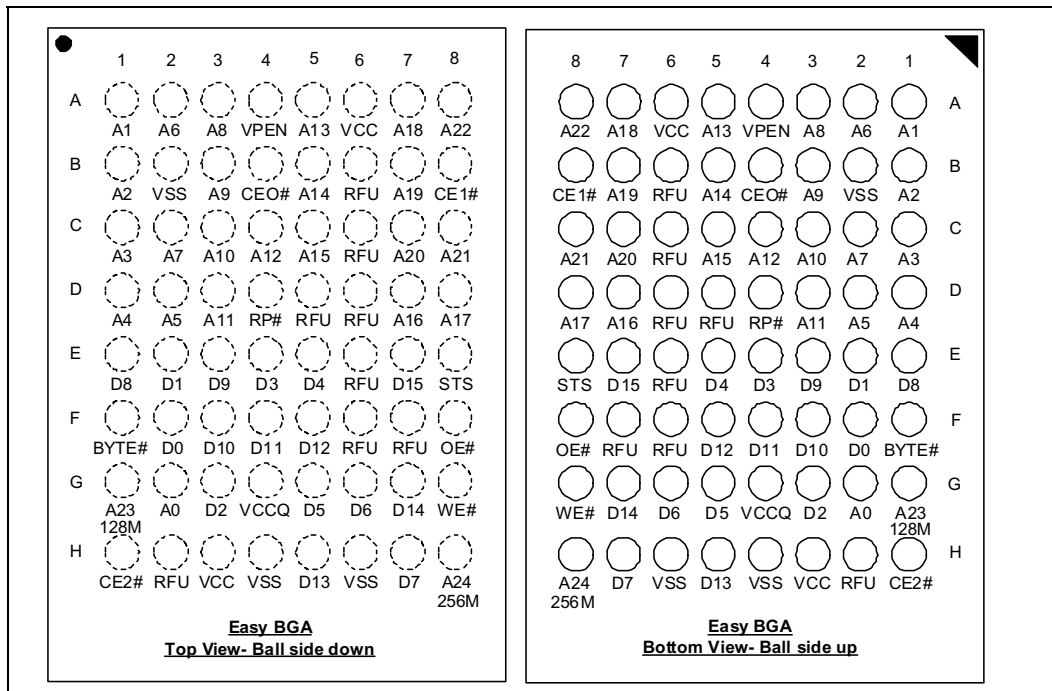

NOTES:

1. Address A22 is only valid on 64-Mbit densities and above, otherwise, it is a no connect (NC).
2. Address A23 is only valid on 128-Mbit densities and above, otherwise, it is a no connect (NC).
3. Address A24 is only valid on 256-Mbit densities and above, otherwise, it is a no connect (NC).


Figure 2. 3 Volt Intel StrataFlash® Memory 56-Lead TSOP (32/64/128 Mbit)

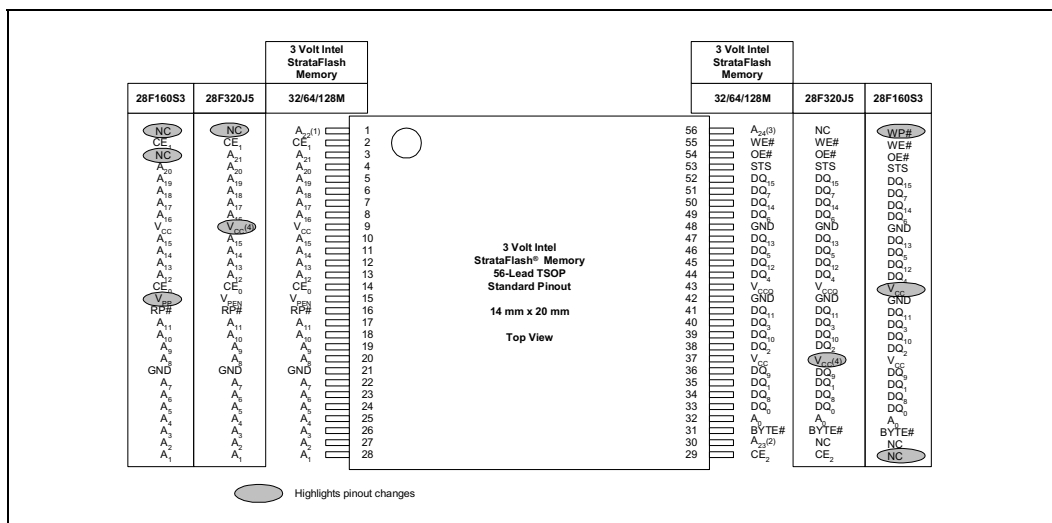

NOTES:

1. A22 exists on 64-, 128- and 256-Mbit densities. On 32-Mbit densities this signal is a no-connect (NC).
2. A23 exists on 128-Mbit densities. On 32- and 64-Mbit densities this signal is a no-connect (NC).
3. A24 exists on 256-Mbit densities. On 32-, 64- and 128-Mbit densities this signal is a no-connect (NC).
4. V_{CC} = 5 V ± 10% for the 28F640J5/28F320J5.

Figure 3. 3 Volt Intel StrataFlash® Memory VF BGA Ballout(32 and 64 Mbit)

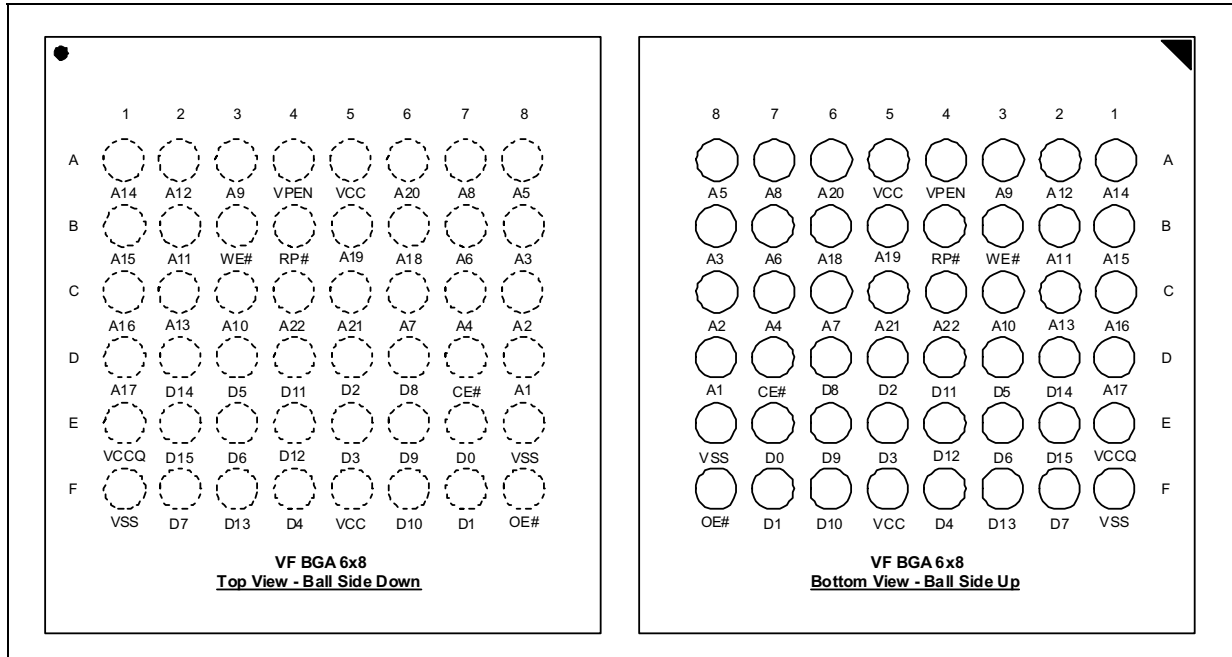

NOTES:

1. CE# is equivalent to CE0, and CE1 and CE2 are internally grounded.
2. A22 exists on the 64 Mb density only. On the 32-Mbit density, this signal is a no-connect (NC).
3. STS not supported on this package.
4. x8 not supported on this package.

2.3 Signal Descriptions

Table 1 lists the active signals used and provides a description of each.

Table 1. Signal Descriptions (Sheet 1 of 2)


| Symbol | Type | Name and Function |
|---------------------|-------------------------|--|
| A0 | INPUT | BYTE-SELECT ADDRESS: Selects between high and low byte when the device is in x8 mode. This address is latched during a x8 program cycle. Not used in x16 mode (i.e., the A0 input buffer is turned off when BYTE# is high). |
| A[23:1] | INPUT | ADDRESS INPUTS: Inputs for addresses during read and program operations. Addresses are internally latched during a program cycle. 32-Mbit: A[21:0] 64-Mbit: A[22:0] 128-Mbit: A[23:0] |
| D[7:0] | INPUT/ OUTPUT | LOW-BYTE DATA BUS: Inputs data during buffer writes and programming, and inputs commands during CUI writes. Outputs array, query, identifier, or status data in the appropriate read mode. Floated when the chip is de-selected or the outputs are disabled. Outputs D[6:0] are also floated when the WSM is busy. Check SR7 to determine WSM status. |
| D[15:8] | INPUT/ OUTPUT | HIGH-BYTE DATA BUS: Inputs data during x16 buffer writes and programming operations. Outputs array, query, or identifier data in the appropriate read mode; not used for Status Register reads. Floated when the chip is de-selected, the outputs are disabled, or the WSM is busy. |
| CE0, CE1, CE2 | INPUT | CHIP ENABLES: Activates the device's control logic, input buffers, decoders, and sense amplifiers. When the device is de-selected (see Table 3 on page 16), power reduces to standby levels. All timing specifications are the same for these three signals. Device selection occurs with the first edge of CE0, CE1, or CE2 that enables the device. Device deselection occurs with the first edge of CE0, CE1, or CE2 that disables the device (see Table 3 on page 16). |
| RP# | INPUT | RESET/ POWER-DOWN: Resets internal automation and puts the device in power-down mode. RP#-high enables normal operation. Exit from reset sets the device to read array mode. When driven low, RP# inhibits write operations which provides data protection during power transitions. |
| OE# | INPUT | OUTPUT ENABLE: Activates the device's outputs through the data buffers during a read cycle. OE# is active low. |
| WE# | INPUT | WRITE ENABLE: Controls writes to the CUI, the Write Buffer, and array blocks. WE# is active low. Addresses and data are latched on the rising edge of the WE# pulse. |
| STS | OPEN DRAIN OUTPUT | STATUS: Indicates the status of the internal state machine. When configured in level mode (default mode), it acts as a RY/BY# signal. When configured in one of its pulse modes, it can pulse to indicate program and/or erase completion. For alternate configurations of the STATUS signal, see the Configurations command. Tie STS to VCCQ with a pull-up resistor. |
| BYTE# | INPUT | BYTE ENABLE: BYTE# low places the device in x8 mode. All data is then input or output on D[7:0], while D[15:8] float. Address A0 selects between the high and low byte. BYTE# high places the device in x16 mode, and turns off the A0 input buffer. Address A1 then becomes the lowest order address. |
| VPEN | INPUT | ERASE / PROGRAM / BLOCK LOCK ENABLE: For erasing array blocks, programming data, or configuring lock-bits. With $V_{PEN} \leq V_{PENLK}$, memory contents cannot be altered. |
| VCC | SUPPLY | DEVICE POWER SUPPLY: With $V_{CC} \leq V_{LKO}$, all write attempts to the flash memory are inhibited. |

Table 1. Signal Descriptions (Sheet 2 of 2)

| Symbol | Type | Name and Function |
|--------|--------|--|
| VCCQ | POWER | I/O POWER SUPPLY: I/O Output-driver source voltage. This ball can be tied to V _{CC} . |
| GND | SUPPLY | GROUND: Do not float any ground signals. |
| NC | | NO CONNECT: Lead is not internally connected; it may be driven or floated. |
| RFU | | RESERVED for FUTURE USE: Balls designated as RFU are reserved by Intel for future device functionality and enhancement. |


2.4 Block Diagram

Figure 4. 3 Volt Intel StrataFlash[®] Memory Block Diagram

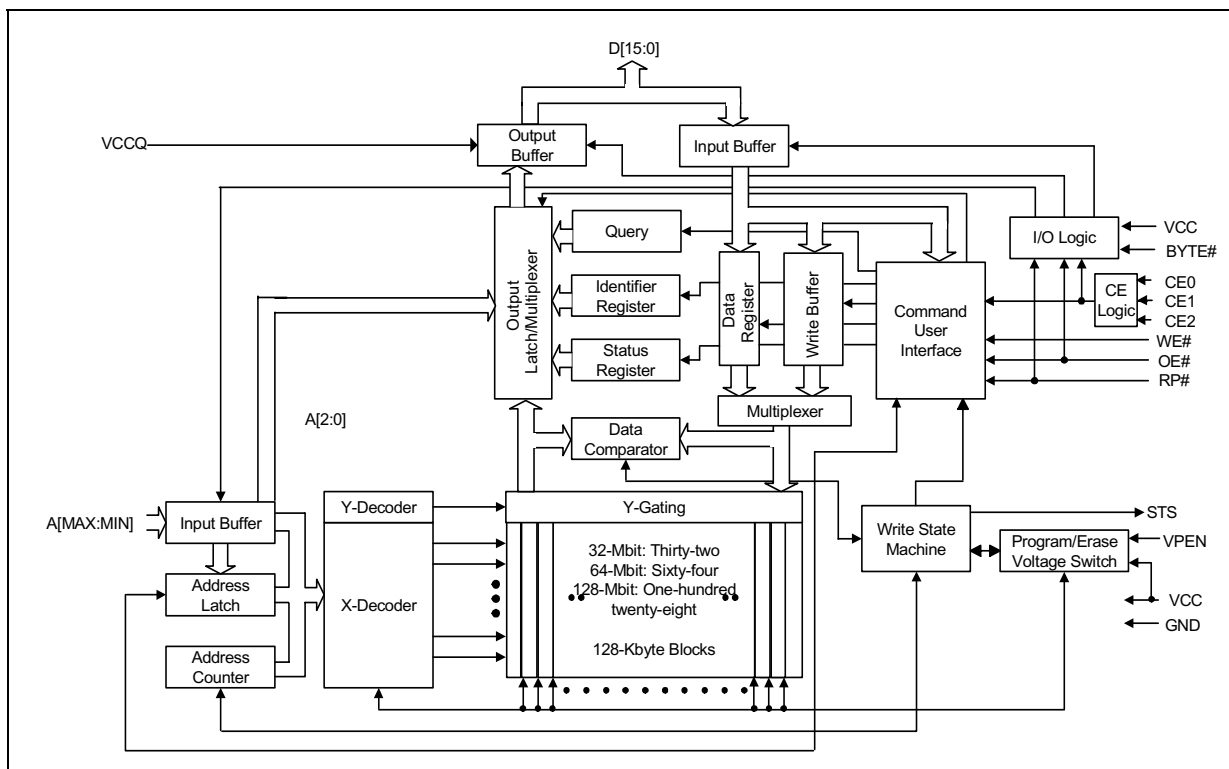

2.5 Memory Map

Figure 5. 3 Volt StrataFlash® Memory Map

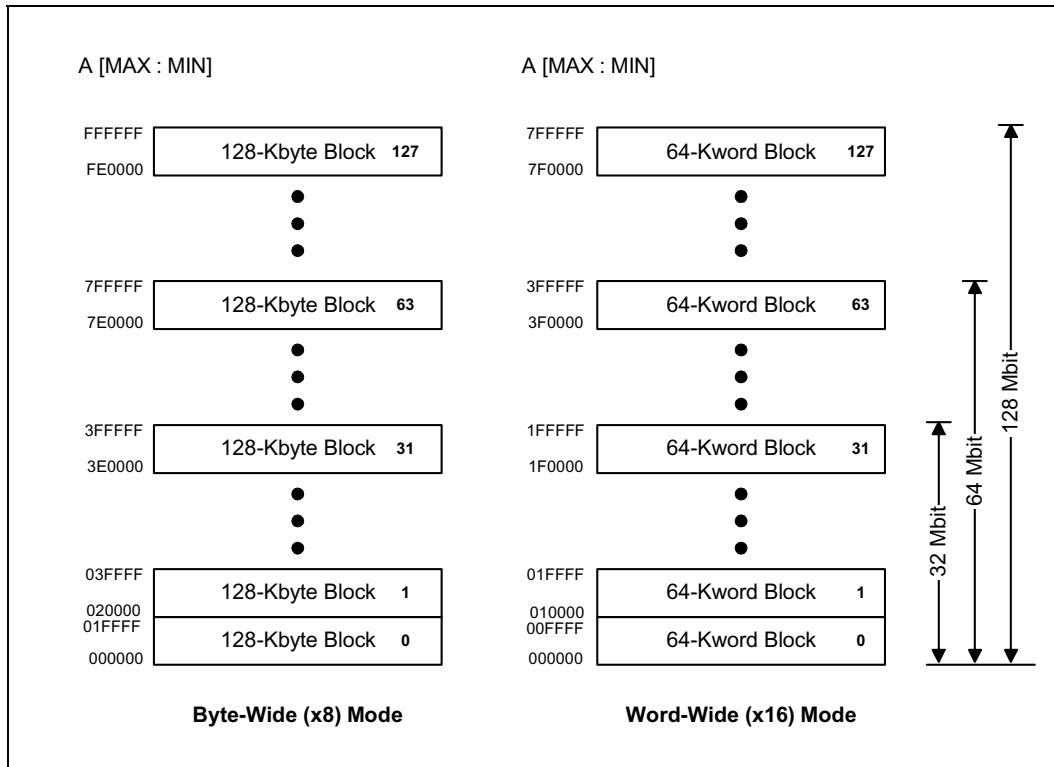

3.0 Device Operations

This section provides an overview of device operations. The on-chip Write State Machine (WSM) manages all block-erase and word-program algorithms. The system CPU provides control of all in-system read, write, and erase operations of the device via the system bus.

Device commands are written to the CUI to control all of the flash memory device's operations. The CUI does not occupy an addressable memory location; it's the mechanism through which the flash device is controlled.

3.1 Bus Operations

The local CPU reads and writes flash memory in-system. All bus cycles to or from the flash memory conform to standard microprocessor bus cycles.

Table 2. Bus Operations

| Mode | RP# | CE0,1,2 | OE# ⁽²⁾ | WE# ⁽²⁾ | Address | VPEN | Data ⁽³⁾ | STS (default mode) | Notes |
|-----------------------|-----------------|----------|--------------------|--------------------|---------------|-------------------|--|-----------------------|---------|
| Read Array | V _{IH} | Enabled | V _{IL} | V _{IH} | X | X | D _{OUT} | High Z ⁽⁷⁾ | 4,5,6 |
| Output Disable | V _{IH} | Enabled | V _{IH} | V _{IH} | X | X | High Z | X | |
| Standby | V _{IH} | Disabled | X | X | X | X | High Z | X | |
| Reset/Power-Down Mode | V _{IL} | X | X | X | X | X | High Z | High Z ⁽⁷⁾ | |
| Read Identifier Codes | V _{IH} | Enabled | V _{IL} | V _{IH} | See Table 5 | X | Note 8 | High Z ⁽⁷⁾ | |
| Read Query | V _{IH} | Enabled | V _{IL} | V _{IH} | See Table 4.4 | X | Note 9 | High Z ⁽⁷⁾ | |
| Read Status (WSM off) | V _{IH} | Enabled | V _{IL} | V _{IH} | X | X | D _{OUT} | | |
| Read Status (WSM on) | V _{IH} | Enabled | V _{IL} | V _{IH} | X | X | D7 = D _{OUT} D[15:8] = High Z D[6:0] = High Z | | |
| Write | V _{IH} | Enabled | V _{IH} | V _{IL} | X | V _{PENH} | D _{IN} | X | 6,10,11 |

NOTES:

- See Table 3 on page 16 for valid CE configurations.
- OE# and WE# should never be enabled simultaneously.
- D refers to D[7:0] if BYTE# is low and D[15:0] if BYTE# is high.
- Refer to *DC Characteristics*. When $V_{PEN} \leq V_{PENLK}$, memory contents can be read, but not altered.
- X can be V_{IL} or V_{IH} for control and address signals, and V_{PENLK} or V_{PENH} for V_{PEN}. See *DC Characteristics* for V_{PENLK} and V_{PENH} voltages.
- In default mode, STS is V_{OL} when the WSM is executing internal block erase, program, or lock-bit configuration algorithms. It is V_{OH} when the WSM is not busy, in block erase suspend mode (with programming inactive), program suspend mode, or reset/power-down mode.
- High Z will be V_{OH} with an external pull-up resistor.
- See Section 4.2, "Read Identifier Codes" on page 19 for read identifier code data.
- See Section 4.4, "Read Query/CFI" on page 22 for read query data.
- Command writes involving block erase, program, or lock-bit configuration are reliably executed when $V_{PEN} = V_{PENH}$ and V_{CC} is within specification.

Table 3. Chip Enable Truth Table

| CE2 | CE1 | CE0 | DEVICE |
|-----------------|-----------------|-----------------|----------|
| V _{IL} | V _{IL} | V _{IL} | Enabled |
| V _{IL} | V _{IL} | V _{IH} | Disabled |
| V _{IL} | V _{IH} | V _{IL} | Disabled |
| V _{IL} | V _{IH} | V _{IH} | Disabled |
| V _{IH} | V _{IL} | V _{IL} | Enabled |
| V _{IH} | V _{IL} | V _{IH} | Enabled |
| V _{IH} | V _{IH} | V _{IL} | Enabled |
| V _{IH} | V _{IH} | V _{IH} | Disabled |

NOTE: For single-chip applications, CE2 and CE1 can be strapped to GND.

3.1.1 Read Mode

To perform a bus read operation, CE# (Please refer to Table 3 on page 16) and OE# must be asserted. CE# is the device-select control; when active, it enables the flash memory device. OE# is the data-output control; when active, the addressed flash memory data is driven onto the I/O bus. For all read states, WE# and RP# must be de-asserted. See Section 11.1, “Read Operations” on page 37. Refer to Section 4.0, “Read Operations” on page 19 for details on reading from the flash array, and refer to Section 8.0, “Special Modes” on page 30 for details regarding all other available read states.

3.1.2 Write

Writing commands to the Command User Interface enables various modes of operation, including the reading of device data, query, identifier codes, inspection and clearing of the Status Register, and, when $V_{PEN} = V_{PENH}$, block erasure, program, and lock-bit configuration.

The Block Erase command requires appropriate command data and an address within the block to be erased. The Byte/Word Program command requires the command and address of the location to be written. Set Block Lock-Bit commands require the command and block within the device to be locked. The Clear Block Lock-Bits command requires the command and address within the device.

The CUI does not occupy an addressable memory location. It is written when the device is enabled and WE# is active. The address and data needed to execute a command are latched on the rising edge of WE# or the first edge of CE0, CE1, or CE2 that disables the device (see Table 3 on page 16). Standard microprocessor write timings are used.

3.1.3 Output Disable

With OE# at a logic-high level (V_{IH}), the device outputs are disabled. Output signals D[15:0] are placed in a high-impedance state.

3.1.4 Standby

CE0, CE1, and CE2 can disable the device (see Table 3 on page 16) and place it in standby mode which substantially reduces device power consumption. D[15:0] outputs are placed in a high-impedance state independent of OE#. If deselected during block erase, program, or lock-bit configuration, the WSM continues functioning, and consuming active power until the operation completes.

3.1.5 Reset/Power-Down

RP# at V_{IL} initiates the reset/power-down mode.

In read modes, RP#-low deselected the memory, places output drivers in a high-impedance state, and turns off numerous internal circuits. RP# must be held low for a minimum of t_{PLPH} . Time t_{PHQV} is required after return from reset mode until initial memory access outputs are valid. After this wake-up interval, normal operation is restored. The CUI is reset to read array mode and Status Register is set to 0x80.

During block erase, program, or lock-bit configuration modes, RP#-low will abort the operation. In default mode, STS transitions low and remains low for a maximum time of $t_{PLPH} + t_{PHRH}$ until the reset operation is complete. Memory contents being altered are no longer valid; the data may be partially corrupted after a program or partially altered after an erase or lock-bit configuration. Time t_{PHWL} is required after RP# goes to logic-high (V_{IH}) before another command can be written.

As with any automated device, it is important to assert RP# during system reset. When the system comes out of reset, it expects to read from the flash memory. Automated flash memories provide status information when accessed during block erase, program, or lock-bit configuration modes. If a CPU reset occurs with no flash memory reset, proper initialization may not occur because the flash memory may be providing status information instead of array data. Intel® Flash memories allow proper initialization following a system reset through the use of the RP# input. In this application, RP# is controlled by the same RESET# signal that resets the system CPU.

3.2 Device Commands

When the V_{PEN} voltage $\leq V_{PENLK}$, only read operations from the Status Register, query, identifier codes, or blocks are enabled. Placing V_{PENH} on V_{PEN} additionally enables block erase, program, and lock-bit configuration operations. Device operations are selected by writing specific commands into the CUI. Table 4, “Intel StrataFlash® Memory Command Set Definitions” on page 17 defines these commands.

Table 4. Intel StrataFlash® Memory Command Set Definitions (Sheet 1 of 2)

| Command | Scalable or Basic Command Set ⁽²⁾ | Bus Cycles Req'd. | First Bus Cycle | | | Second Bus Cycle | | | Notes |
|-----------------------|--|-------------------|---------------------|---------------------|-----------------------|---------------------|---------------------|-----------------------|-------|
| | | | Oper ⁽³⁾ | Addr ⁽⁴⁾ | Data ^(5,6) | Oper ⁽³⁾ | Addr ⁽⁴⁾ | Data ^(5,6) | |
| Read Array | SCS/BCS | 1 | Write | X | 0xFF | | | | 1 |
| Read Identifier Codes | SCS/BCS | ≥ 2 | Write | X | 0X90 | Read | IA | ID | 1,7 |
| Read Query | SCS | ≥ 2 | Write | X | 0x98 | Read | QA | QD | 1 |

Table 4. Intel StrataFlash® Memory Command Set Definitions (Sheet 2 of 2)

| Command | Scalable or Basic Command Set ⁽²⁾ | Bus Cycles Req'd. | First Bus Cycle | | | Second Bus Cycle | | | Notes |
|------------------------------|--|-------------------|---------------------|---------------------|-----------------------|---------------------|---------------------|-----------------------|-----------|
| | | | Oper ⁽³⁾ | Addr ⁽⁴⁾ | Data ^(5,6) | Oper ⁽³⁾ | Addr ⁽⁴⁾ | Data ^(5,6) | |
| Read Status Register | SCS/BCS | 2 | Write | X | 0x70 | Read | X | SRD | 1,8 |
| Clear Status Register | SCS/BCS | 1 | Write | X | 0x50 | | | | 1 |
| Write to Buffer | SCS/BCS | > 2 | Write | BA | 0xE8 | Write | BA | N | 1,9,10,11 |
| Word/Byte Program | SCS/BCS | 2 | Write | X | 0x40 or 0x10 | Write | PA | PD | 1,12,13 |
| Block Erase | SCS/BCS | 2 | Write | BA | 0x20 | Write | BA | 0xD0 | 1,11,12 |
| Block Erase, Program Suspend | SCS/BCS | 1 | Write | X | 0xB0 | | | | 1,12,14 |
| Block Erase, Program Resume | SCS/BCS | 1 | Write | X | 0xD0 | | | | 1,12 |
| Configuration | SCS | 2 | Write | X | 0xB8 | Write | X | CC | 1 |
| Set Block Lock-Bit | SCS | 2 | Write | X | 0x60 | Write | BA | 0x01 | 1 |
| Clear Block Lock-Bits | SCS | 2 | Write | X | 0x60 | Write | X | 0xD0 | 1,15 |
| Protection Program | | 2 | Write | X | 0xC0 | Write | PA | PD | 1 |

NOTES:

- Commands other than those shown above are reserved by Intel for future device implementations and should not be used.
- The Basic Command Set (BCS) is the same as the 28F008SA Command Set or Intel Standard Command Set. The Scalable Command Set (SCS) is also referred to as the Intel Extended Command Set.
- Bus operations are defined in Table 2.
- X = Any valid address within the device.
BA = Address within the block.
IA = Identifier Code Address: see Table 5.
QA = Query database Address.
PA = Address of memory location to be programmed.
RCD = Data to be written to the read configuration register. This data is presented to the device on A[16:1]; all other address inputs are ignored.
- ID = Data read from Identifier Codes.
QD = Data read from Query database.
SRD = Data read from Status Register. See Table 6 for a description of the Status Register bits.
PD = Data to be programmed at location PA. Data is latched on the rising edge of WE#.
CC = Configuration Code.
- The upper byte of the data bus (D[15:8]) during command writes is a "Don't Care" in x16 operation.
- Following the Read Identifier Codes command, read operations access manufacturer, device and block lock codes. See Section 4.2 for read identifier code data.
- If the WSM is running, only D7 is valid; D[15:8] and D[6:0] float, which places them in a high-impedance state.
- After the Write to Buffer command is issued check the XSR to make sure a buffer is available for writing.
- The number of bytes/words to be written to the Write Buffer = N + 1, where N = byte/word count argument. Count ranges on this device for byte mode are N = 00H to N = 1FH and for word mode are N = 0x00 to N = 0x0F. The third and consecutive bus cycles, as determined by N, are for writing data into the Write Buffer. The Confirm command (0xD0) is expected after exactly N + 1 write cycles; any other command at that point in the sequence aborts the write to buffer operation. See Figure 12, "Write to Buffer Flowchart" on page 52 for additional information
- The write to buffer or erase operation does not begin until a Confirm command (0xD0) is issued.
- Attempts to issue a block erase or program to a locked block.
- Either 0x40 or 0x10 are recognized by the WSM as the byte/word program setup.
- Program suspends can be issued after either the Write-to-Buffer or Word/Byte-Program operation is initiated.
- The clear block lock-bits operation simultaneously clears all block lock-bits.

4.0 Read Operations

The device supports four types of read modes: read array, read identifier, read status or read query. Upon power-up or return from reset, the device defaults to read array mode. To change the device's read mode, the appropriate Read command must be written to the device. (See Section 3.2, "Device Commands" on page 17.) See Section 8.0, "Special Modes" on page 30 for details regarding read status, read ID, and CFI query modes.

Upon initial device power-up or after exit from reset/power-down mode, the device automatically resets to read array mode. Otherwise, write the appropriate read mode command (Read Array, Read Query, Read Identifier Codes, or Read Status Register) to the CUI. Six control signals dictate the data flow in and out of the component: CE0, CE1, CE2, OE#, WE#, and RP#. The device must be enabled (see Table 3, "Chip Enable Truth Table" on page 16), and OE# must be driven active to obtain data at the outputs. CE0, CE1, and CE2 are the device selection controls and, when enabled (see Table 3), select the memory device. OE# is the data output (D[15:0]) control and, when active, drives the selected memory data onto the I/O bus. WE# must be at V_{IH} .

4.1 Read Array

Upon initial device power-up and after exit from reset/power-down mode, the device defaults to read array mode. The read configuration register defaults to asynchronous read page mode. The Read Array command also causes the device to enter read array mode. The device remains enabled for reads until another command is written. If the internal WSM has started a block erase, program, or lock-bit configuration, the device will not recognize the Read Array command until the WSM completes its operation unless the WSM is suspended via an Erase or Program Suspend command. The Read Array command functions independently of the V_{PEN} voltage.

4.1.1 Asynchronous Page-Mode Read

Asynchronous Page Mode is the default read mode on power-up or reset. To perform a page mode read after any other operation, the Read Array command must be issued to read from the flash array. Asynchronous page mode reads are permitted in all blocks and is used to access register information, but only one word is loaded into the page buffer during register access. In asynchronous page mode, array data is sensed and loaded into a page buffer. After the initial delay, the first word out of the page buffer corresponds to the initial address.

Address bits A[2:0] determine which word is output from the page buffer. Subsequent reads from the device come from the page buffer, and are output on D[15:0] after a minimum delay as long as address bits A[2:0] are the only address bits that change. Data can be read from the page buffer multiple times, and in any order. If address bits A[MAX:3] change at any time, or if CE# is toggled, the device will sense and load new data into the page buffer.

4.2 Read Identifier Codes

The Read identifier codes operation outputs the manufacturer code, device-code, and the block lock configuration codes for each block (See Figure 3.2 on page 17 for details on issuing the Read Device Identifier command). Page-mode reads are not supported in this read mode. To terminate the operation, write another valid command. Like the Read Array command, the Read Identifier

Codes command functions independently of the V_{PEN} voltage. This command is valid only when the WSM is off or the device is suspended. Following the Read Identifier Codes command, the following information can be read

Table 5. Identifier Codes

| Code | | Address ⁽¹⁾ | Data |
|---------------------------|----------|------------------------|---------|
| Manufacture Code | | 00000 | (00) 89 |
| Device Code | 32-Mbit | 00001 | (00) 16 |
| | 64-Mbit | 00001 | (00) 17 |
| | 128-Mbit | 00001 | (00) 18 |
| Block Lock Configuration | | X0002 ⁽²⁾ | |
| • Block Is Unlocked | | | D0 = 0 |
| • Block Is Locked | | | D0 = 1 |
| • Reserved for Future Use | | | D[7:1] |

NOTES:

- A0 is not used in either x8 or x16 modes when obtaining the identifier codes. The lowest order address line is A1. Data is always presented on the low byte in x16 mode (upper byte contains 00h).
- X selects the specific block's lock configuration code.

4.3 Read Status Register

The Status Register may be read to determine when a block erase, program, or lock-bit configuration is complete and whether the operation completed successfully. It may be read at any time by writing the Read Status Register command. After writing this command, all subsequent read operations output data from the Status Register until another valid command is written. Page-mode reads are not supported in this read mode. The Status Register contents are latched on the falling edge of OE# or the first edge of CE0, CE1, or CE2 that enables the device (see Table 3, "Chip Enable Truth Table" on page 16). OE# must toggle to V_{IH} or the device must be disabled before further reads to update the Status Register latch. The Read Status Register command functions independently of the V_{PEN} voltage.

During a program, block erase, set lock-bit, or clear lock-bit command sequence, only SR7 is valid until the Write State Machine completes or suspends the operation. Device I/O signals D[6:0] and D[15:8] are placed in a high-impedance state. When the operation completes or suspends (check SR7), all contents of the Status Register are valid when read.

Table 6. Status Register Definitions

| WSMS | ESS | ECLBS | PSLBS | VPENS | PSS | DPS | R |
|--------------------------|--|-------|-------|-------|--|-------|-------|
| bit 7 | bit 6 | bit 5 | bit 4 | bit 3 | bit 2 | bit 1 | bit 0 |
| High Z When Busy? | Status Register Bits | | | | Notes | | |
| No | SR7 = WRITE STATE MACHINE STATUS 1 = Ready 0 = Busy | | | | Check STS or SR7 to determine block erase, program, or lock-bit configuration completion. SR[6:0] are not driven while SR7 = "0." | | |
| Yes | SR6 = ERASE SUSPEND STATUS 1 = Block Erase Suspended 0 = Block Erase in Progress/Completed | | | | | | |
| Yes | SR5 = ERASE AND CLEAR LOCK-BITS STATUS 1 = Error in Block Erasure or Clear Lock-Bits 0 = Successful Block Erase or Clear Lock-Bits | | | | If both SR5 and SR4 are "1"s after a block erase or lock-bit configuration attempt, an improper command sequence was entered. | | |
| Yes | SR4 = PROGRAM AND SET LOCK-BIT STATUS 1 = Error in Setting Lock-Bit 0 = Successful Set Block Lock Bit | | | | | | |
| Yes | SR3 = PROGRAMMING VOLTAGE STATUS 1 = Low Programming Voltage Detected, Operation Aborted 0 = Programming Voltage OK | | | | SR3 does not provide a continuous programming voltage level indication. The WSM interrogates and indicates the programming voltage level only after Block Erase, Program, Set Block Lock-Bit, or Clear Block Lock-Bits command sequences. | | |
| Yes | SR2 = PROGRAM SUSPEND STATUS 1 = Program suspended 0 = Program in progress/completed | | | | | | |
| Yes | SR1 = DEVICE PROTECT STATUS 1 = Block Lock-Bit Detected, Operation Abort 0 = Unlock | | | | SR1 does not provide a continuous indication of block lock-bit values. The WSM interrogates the block lock-bits only after Block Erase, Program, or Lock-Bit configuration command sequences. It informs the system, depending on the attempted operation, if the block lock-bit is set. Read the block lock configuration codes using the Read Identifier Codes command to determine block lock-bit status. | | |
| Yes | SR0 = RESERVED FOR FUTURE ENHANCEMENTS | | | | SR0 is reserved for future use and should be masked when polling the Status Register. | | |

Table 7. eXtended Status Register Definitions

| WBS | Reserved | |
|--------------------------|--|--|
| bit 7 | bits 6—0 | |
| High Z When Busy? | Status Register Bits | Notes |
| No | XSR7 = WRITE BUFFER STATUS 1 = Write buffer available 0 = Write buffer not available | After a Buffer-Write command, XSR7 = 1 indicates that a Write Buffer is available. |
| Yes | XSR6–XSR0 = RESERVED FOR FUTURE ENHANCEMENTS | SR[6:0] are reserved for future use and should be masked when polling the Status Register. |

4.4 Read Query/CFI

The query register contains an assortment of flash product information such as block size, density, allowable command sets, electrical specifications and other product information. The data contained in this register conforms to the Common Flash Interface (CFI) protocol. To obtain any information from the query register, execute the Read Query Register command. See Section 3.2, “Device Commands” on page 17 for details on issuing the CFI Query command. Refer to Appendix B, “Query Structure Overview” on page 46 for a detailed explanation of the CFI register. Information contained in this register can only be accessed by executing a single-word read.

5.0 Programming Operations

The device supports two different programming methods: word programming, and write-buffer programming. Successful programming requires the addressed block to be unlocked. An attempt to program a locked block will result in the operation aborting, and SR1 and SR4 being set, indicating a programming error. The following sections describe device programming in detail.

5.1 Byte/Word Program

Byte/Word program is executed by a two-cycle command sequence. Byte/Word program setup (standard 0x40 or alternate 0x10) is written followed by a second write that specifies the address and data (latched on the rising edge of WE#). The WSM then takes over, controlling the program and program verify algorithms internally. After the program sequence is written, the device automatically outputs SRD when read (see Figure 14, “Byte/Word Program Flowchart” on page 54). The CPU can detect the completion of the program event by analyzing the STS signal or SR7.

When program is complete, SR4 should be checked. If a program error is detected, the Status Register should be cleared. The internal WSM verify only detects errors for “1”s that do not successfully program to “0”s. The CUI remains in Read Status Register mode until it receives another command.

Reliable byte/word programming can only occur when V_{CC} and V_{PEN} are valid. If a byte/word program is attempted while $V_{PEN} \leq V_{PENLK}$, SR4 and SR3 will be set. Successful byte/word programs require that the corresponding block lock-bit be cleared. If a byte/word program is attempted when the corresponding block lock-bit is set, SR1 and SR4 will be set.

5.2 Write to Buffer

To program the flash device, a Write to Buffer command sequence is initiated. A variable number of bytes, up to the buffer size, can be loaded into the buffer and written to the flash device. First, the Write to Buffer Setup command is issued along with the Block Address (see Figure 12, “Write to Buffer Flowchart” on page 52). At this point, the eXtended Status Register (XSR, see Table 7) information is loaded and XSR7 reverts to “buffer available” status. If XSR7 = 0, the write buffer is not available. To retry, continue monitoring XSR7 by issuing the Write to Buffer setup command with the Block Address until XSR7 = 1. When XSR7 transitions to a “1,” the buffer is ready for loading.

Next, a word/byte count is given to the part with the Block Address. On the next write, a device start address is given along with the write buffer data. Subsequent writes provide additional device addresses and data, depending on the count. All subsequent addresses must lie within the start address plus the count.

Internally, this device programs many flash cells in parallel. Because of this parallel programming, maximum programming performance and lower power are obtained by aligning the start address at the beginning of a write buffer boundary (i.e., A[4:0] of the start address = 0).

After the final buffer data is given, a Write Confirm command is issued. This initiates the WSM (Write State Machine) to begin copying the buffer data to the flash array. If a command other than Write Confirm is written to the device, an “Invalid Command/Sequence” error will be generated and SR5 and SR4 will be set. For additional buffer writes, issue another Write to Buffer Setup command and check XSR7.

If an error occurs while writing, the device will stop writing, and SR4 will be set to indicate a program failure. The internal WSM verify only detects errors for “1”s that do not successfully program to “0”s. If a program error is detected, the Status Register should be cleared. Any time SR4 and/or SR5 is set (e.g., a media failure occurs during a program or an erase), the device will not accept any more Write to Buffer commands. Additionally, if the user attempts to program past an erase block boundary with a Write to Buffer command, the device will abort the write to buffer operation. This will generate an “Invalid Command/Sequence” error and SR5 and SR4 will be set.

Reliable buffered writes can only occur when $V_{PEN} = V_{PENH}$. If a buffered write is attempted while $V_{PEN} \leq V_{PENLK}$, SR4 and SR3 will be set. Buffered write attempts with invalid V_{CC} and V_{PEN} voltages produce spurious results and should not be attempted. Finally, successful programming requires that the corresponding block lock-bit be reset. If a buffered write is attempted when the corresponding block lock-bit is set, SR1 and SR4 will be set.

5.3 Program Suspend

The Program Suspend command allows program interruption to read data in other flash memory locations. Once the programming process starts (either by initiating a write to buffer or byte/word program operation), writing the Program Suspend command requests that the WSM suspend the program sequence at a predetermined point in the algorithm. The device continues to output SRD when read after the Program Suspend command is written. Polling SR7 can determine when the programming operation has been suspended. When SR7 = 1, SR2 should also be set, indicating that the device is in the program suspend mode. STS in level RY/BY# mode will also transition to V_{OH} . Specification t_{WHRH1} defines the program suspend latency.

At this point, a Read Array command can be written to read data from locations other than that which is suspended. The only other valid commands while programming is suspended are Read Query, Read Status Register, Clear Status Register, Configure, and Program Resume. After a Program Resume command is written, the WSM will continue the programming process. SR2 and SR7 will automatically clear and STS in RY/BY# mode will return to V_{OL} . After the Program Resume command is written, the device automatically outputs SRD when read. V_{PEN} must remain at V_{PENH} and V_{CC} must remain at valid V_{CC} levels (the same V_{PEN} and V_{CC} levels used for programming) while in program suspend mode. Refer to Figure 15, “Program Suspend/Resume Flowchart” on page 55.

5.4 Program Resume

To resume (i.e., continue) a program suspend operation, execute the Program Resume command. The Resume command can be written to any device address. When a program operation is nested within an erase suspend operation and the Program Suspend command is issued, the device will suspend the program operation. When the Resume command is issued, the device will resume and complete the program operation. Once the nested program operation is completed, an additional Resume command is required to complete the block erase operation. The device supports a maximum suspend/resume of two nested routines. See Figure 15, “Program Suspend/Resume Flowchart” on page 55).

6.0 Erase Operations

Flash erasing is performed on a block basis; therefore, only one block can be erased at a time. Once a block is erased, all bits within that block will read as a logic level one. To determine the status of a block erase, poll the Status Register and analyze the bits. This following section describes block erase operations in detail.

6.1 Block Erase

Erase is executed one block at a time and initiated by a two-cycle command. A block erase setup is first written, followed by an block erase confirm. This command sequence requires an appropriate address within the block to be erased (erase changes all block data to FFH). Block preconditioning, erase, and verify are handled internally by the WSM (invisible to the system). After the two-cycle block erase sequence is written, the device automatically outputs SRD when read (see Figure 16, “Block Erase Flowchart” on page 56). The CPU can detect block erase completion by analyzing the output of the STS signal or SR7. Toggle OE#, CE0, CE1, or CE2 to update the Status Register.

When the block erase is complete, SR5 should be checked. If a block erase error is detected, the Status Register should be cleared before system software attempts corrective actions. The CUI remains in Read Status Register mode until a new command is issued.

This two-step command sequence of setup followed by execution ensures that block contents are not accidentally erased. An invalid Block Erase command sequence will result in both SR4 and SR5 being set. Also, reliable block erasure can only occur when V_{CC} is valid and $V_{PEN} = V_{PENH}$. If block erase is attempted while $V_{PEN} \leq V_{PENLK}$, SR3 and SR5 will be set. Successful block erase requires that the corresponding block lock-bit be cleared. If block erase is attempted when the corresponding block lock-bit is set, SR1 and SR5 will be set.

6.2 Block Erase Suspend

The Block Erase Suspend command allows block-erase interruption to read or program data in another block of memory. Once the block erase process starts, writing the Block Erase Suspend command requests that the WSM suspend the block erase sequence at a predetermined point in the algorithm. The device outputs SRD when read after the Block Erase Suspend command is written. Polling SR7 then SR6 can determine when the block erase operation has been suspended (both will be set). In default mode, STS will also transition to V_{OH} . Specification t_{WHRH} defines the block erase suspend latency.

At this point, a Read Array command can be written to read data from blocks other than that which is suspended. A program command sequence can also be issued during erase suspend to program data in other blocks. During a program operation with block erase suspended, SR7 will return to “0” and STS output (in default mode) will transition to V_{OL} . However, SR6 will remain “1” to indicate block erase suspend status. Using the Program Suspend command, a program operation can also be suspended. Resuming a suspended programming operation by issuing the Program Resume command allows continuing of the suspended programming operation. To resume the suspended erase, the user must wait for the programming operation to complete before issuing the Block Erase Resume command.

The only other valid commands while block erase is suspended are Read Query, Read Status Register, Clear Status Register, Configure, and Block Erase Resume. After a Block Erase Resume command is written to the flash memory, the WSM will continue the block erase process. SR6 and SR7 will automatically clear and STS (in default mode) will return to V_{OL} . After the Erase Resume command is written, the device automatically outputs SRD when read (see Figure 17, “Block Erase Suspend/Resume Flowchart” on page 57). V_{PEN} must remain at V_{PENH} (the same V_{PEN} level used for block erase) while block erase is suspended. Block erase cannot resume until program operations initiated during block erase suspend have completed.

6.3 Erase Resume

To resume (i.e., continue) an erase suspend operation, execute the Erase Resume command. The Resume command can be written to any device address. When a program operation is nested within an erase suspend operation and the Program Suspend command is issued, the device will suspend the program operation. When the Resume command is issued, the device will resume the program operations first. Once the nested program operation is completed, an additional Resume command is required to complete the block erase operation. The device supports a maximum suspend/resume of two nested routines. See Figure 16, “Block Erase Flowchart” on page 56.

7.0 Security Modes

This device offers both hardware and software security features. Block lock operations, PRs, and VPEN allow the user to implement various levels of data protection. The following section describes security features in detail.

7.1 Set Block Lock-Bit

A flexible block locking scheme is enabled via block lock-bits. The block lock-bits gate program and erase operations. Individual block lock-bits can be set using the Set Block Lock-Bit command. This command is invalid while the WSM is running or the device is suspended.

Set block lock-bit commands are executed by a two-cycle sequence. The set block setup along with appropriate block address is followed by either the set block lock-bit confirm (and an address within the block to be locked). The WSM then controls the set lock-bit algorithm. After the sequence is written, the device automatically outputs Status Register data when read (see Figure 18 on page 58). The CPU can detect the completion of the set lock-bit event by analyzing the STS signal output or SR7.

When the set lock-bit operation is complete, SR4 should be checked. If an error is detected, the Status Register should be cleared. The CUI will remain in Read Status Register mode until a new command is issued.

This two-step sequence of setup followed by execution ensures that lock-bits are not accidentally set. An invalid Set Block Lock-Bit command will result in SR4 and SR5 being set. Also, reliable operations occur only when V_{CC} and V_{PEN} are valid. With $V_{PEN} \leq V_{PENLK}$, lock-bit contents are protected against alteration.

7.2 Clear Block Lock-Bits

All set block lock-bits are cleared in parallel via the Clear Block Lock-Bits command. Block lock-bits can be cleared using only the Clear Block Lock-Bits command. This command is invalid while the WSM is running or the device is suspended.

Clear block lock-bits command is executed by a two-cycle sequence. A clear block lock-bits setup is first written. The device automatically outputs Status Register data when read (see Figure 19 on page 59). The CPU can detect completion of the clear block lock-bits event by analyzing the STS signal output or SR7.

When the operation is complete, SR5 should be checked. If a clear block lock-bit error is detected, the Status Register should be cleared. The CUI will remain in Read Status Register mode until another command is issued.

This two-step sequence of setup followed by execution ensures that block lock-bits are not accidentally cleared. An invalid Clear Block Lock-Bits command sequence will result in SR4 and SR5 being set. Also, a reliable clear block lock-bits operation can only occur when V_{CC} and V_{PEN} are valid. If a clear block lock-bits operation is attempted while $V_{PEN} \leq V_{PENLK}$, SR3 and SR5 will be set.

If a clear block lock-bits operation is aborted due to V_{PEN} or V_{CC} transitioning out of valid range, block lock-bit values are left in an undetermined state. A repeat of clear block lock-bits is required to initialize block lock-bit contents to known values.

7.3 Protection Register Program

The 3 Volt Intel StrataFlash® memory includes a 128-bit Protection Register that can be used to increase the security of a system design. For example, the number contained in the PR can be used to “mate” the flash component with other system components such as the CPU or ASIC, preventing device substitution.

The 128-bits of the PR are divided into two 64-bit segments. One of the segments is programmed at the Intel factory with a unique 64-bit number, which is unalterable. The other segment is left blank for customer designers to program as desired. Once the customer segment is programmed, it can be locked to prevent further programming.

7.3.1 Reading the Protection Register

The Protection Register is read in the identification read mode. The device is switched to this mode by issuing the Read Identifier command (0x90). Once in this mode, read cycles from addresses shown in Table 8 or Table 9 retrieve the specified information. To return to read array mode, write the Read Array command (0xFF).

7.3.2 Programming the Protection Register


Protection Register bits are programmed using the two-cycle Protection Program command. The 64-bit number is programmed 16 bits at a time for word-wide configuration and eight bits at a time for byte-wide configuration. First write the Protection Program Setup command, 0xC0. The next write to the device will latch in address and data and program the specified location. The allowable addresses are shown in Table 8 or Table 9. See Figure 20, “Protection Register Programming Flowchart” on page 60

Any attempt to address Protection Program commands outside the defined PR address space will result in a Status Register error (SR4 will be set). Attempting to program a locked PR segment will result in a Status Register error (SR4 and SR1 will be set).

7.3.3 Locking the Protection Register

The user-programmable segment of the Protection Register is lockable by programming Bit 1 of the PLR to 0. Bit 0 of this location is programmed to 0 at the Intel factory to protect the unique device number. Bit 1 is set using the Protection Program command to program “0xFFFD” to the PLR. After these bits have been programmed, no further changes can be made to the values stored in the protection register. Protection Program commands to a locked section will result in a Status Register error (SR4 and SR1 will be set). PR lockout state is not reversible.

Figure 6. Protection Register Memory Map

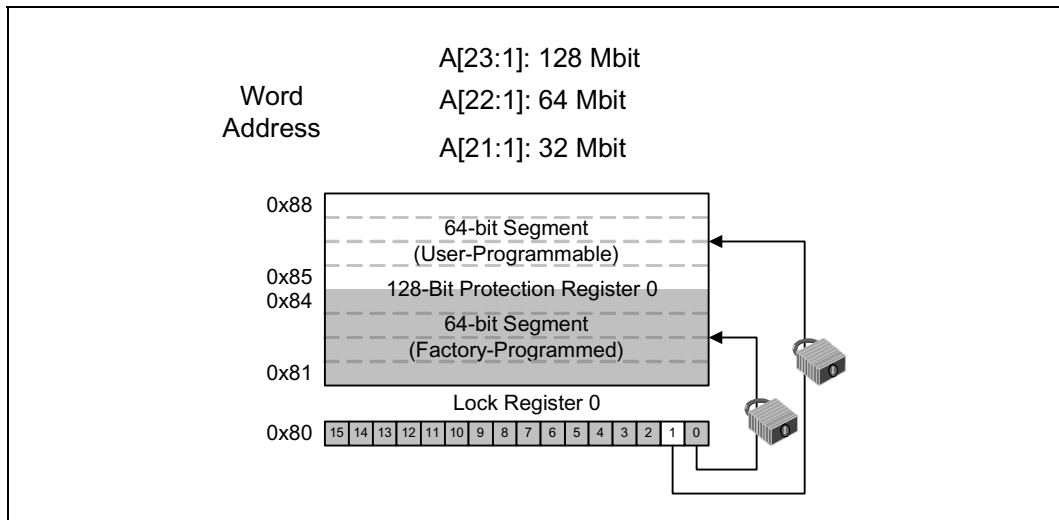

NOTE: A0 is not used in x16 mode when accessing the protection register map (See Table 8 for x16 addressing). For x8 mode A0 is used (See Table 9 for x8 addressing).

Table 8. Word-Wide Protection Register Addressing

| Word | Use | A8 | A7 | A6 | A5 | A4 | A3 | A2 | A1 |
|------|---------|----|----|----|----|----|----|----|----|
| LOCK | Both | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 0 | Factory | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| 1 | Factory | 1 | 0 | 0 | 0 | 0 | 0 | 1 | 0 |
| 2 | Factory | 1 | 0 | 0 | 0 | 0 | 0 | 1 | 1 |
| 3 | Factory | 1 | 0 | 0 | 0 | 0 | 1 | 0 | 0 |
| 4 | User | 1 | 0 | 0 | 0 | 0 | 1 | 0 | 1 |
| 5 | User | 1 | 0 | 0 | 0 | 0 | 1 | 1 | 0 |
| 6 | User | 1 | 0 | 0 | 0 | 0 | 1 | 1 | 1 |
| 7 | User | 1 | 0 | 0 | 0 | 1 | 0 | 0 | 0 |

NOTE: All address lines not specified in the above table must be 0 when accessing the Protection Register (i.e., A[**MAX:9**] = 0.)

Table 9. Byte-Wide Protection Register Addressing

| Byte | Use | A8 | A7 | A6 | A5 | A4 | A3 | A2 | A1 | A0 |
|------|---------|----|----|----|----|----|----|----|----|----|
| LOCK | Both | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| LOCK | Both | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| 0 | Factory | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 |
| 1 | Factory | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 |
| 2 | Factory | 1 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 |
| 3 | Factory | 1 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 1 |
| 4 | Factory | 1 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 0 |
| 5 | Factory | 1 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 |
| 6 | Factory | 1 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 |
| 7 | Factory | 1 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 1 |
| 8 | User | 1 | 0 | 0 | 0 | 0 | 1 | 0 | 1 | 0 |
| 9 | User | 1 | 0 | 0 | 0 | 0 | 1 | 0 | 1 | 1 |
| A | User | 1 | 0 | 0 | 0 | 0 | 1 | 1 | 0 | 0 |
| B | User | 1 | 0 | 0 | 0 | 0 | 1 | 1 | 0 | 1 |
| C | User | 1 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 0 |
| D | User | 1 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 |
| E | User | 1 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 |
| F | User | 1 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 1 |

NOTE: All address lines not specified in the above table must be 0 when accessing the Protection Register, i.e., A[**MAX:9**] = 0.

7.4 Array Protection

The V_{PEN} signal is a hardware mechanism to prohibit array alteration. When the V_{PEN} voltage is below the V_{PENLK} voltage, array contents cannot be altered. To ensure a proper erase or program operation, V_{PEN} must be set to a valid voltage level. To determine the status of an erase or program operation, poll the Status Register and analyze the bits.

8.0 Special Modes

This section describes how to read the status, ID, and CFI registers. This section also details how to configure the STS signal.

8.1 Set Read Configuration

This command is not supported on this product. This device will default to the asynchronous page mode. If this command is given to the device, it will not affect the operation of the device.

8.1.1 Read Configuration

The device will support both asynchronous page mode and standard word/byte reads. No configuration is required.

Status Register and identifier only support standard word/byte single read operations.

Table 10. Read Configuration Register Definition

| | | | | | | | |
|--|----|----|----|--|----|----|---|
| RM | R | R | R | R | R | R | R |
| 16 (A16) | 15 | 14 | 13 | 12 | 11 | 10 | 9 |
| R | R | R | R | R | R | R | R |
| 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
| | | | | Notes | | | |
| RCR.16 = READ MODE (RM) 0 = Standard Word/Byte Reads Enabled (Default) 1 = Page-Mode Reads Enabled | | | | Read mode configuration effects reads from the flash array. Status Register, query, and identifier reads support standard word/byte read cycles. | | | |
| RCR.15–1 = RESERVED FOR FUTURE ENHANCEMENTS (R) | | | | These bits are reserved for future use. Set these bits to “0.” | | | |

8.2 STS

The Status (STS) signal can be configured to different states using the Configuration command. Once the STS signal has been configured, it remains in that configuration until another configuration command is issued or $RP\#$ is asserted low. Initially, the STS signal defaults to RY/BY# operation where RY/BY# low indicates that the WSM is busy. RY/BY# high indicates that the state machine is ready for a new operation or suspended. Table 11, “STS Configuration Coding Definitions” on page 31 displays the possible STS configurations.

To reconfigure the Status (STS) signal to other modes, the Configuration command is given followed by the desired configuration code. The three alternate configurations are all pulse mode for use as a system interrupt as described below. For these configurations, bit 0 controls Erase Complete interrupt pulse, and bit 1 controls Program Complete interrupt pulse. Supplying the 0x00 configuration code with the Configuration command resets the STS signal to the default RY/BY# level mode. The possible configurations and their usage are described in Table 11, “STS Configuration Coding Definitions” on page 31. The Configuration command may only be given when the device is not busy or suspended. Check SR7 for device status. An invalid configuration code will result in both SR4 and SR5 being set. When configured in one of the pulse modes, the STS signal pulses low with a typical pulse width of 250 ns.

Table 11. STS Configuration Coding Definitions

| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|---|----|----|----|---|----|-------------------------------|-----------------------------|
| Reserved | | | | | | Pulse on Program Complete (1) | Pulse on Erase Complete (1) |
| D[1:0] = STS Configuration Codes | | | | Notes | | | |
| 00 = default, level mode; device ready indication | | | | Used to control HOLD to a memory controller to prevent accessing a flash memory subsystem while any flash device's WSM is busy. | | | |
| 01 = pulse on Erase Complete | | | | Used to generate a system interrupt pulse when any flash device in an array has completed a block erase. Helpful for reformatting blocks after file system free space reclamation or "cleanup." | | | |
| 10 = pulse on Program Complete | | | | Used to generate a system interrupt pulse when any flash device in an array has completed a program operation. Provides highest performance for servicing continuous buffer write operations. | | | |
| 11 = pulse on Erase or Program Complete | | | | Used to generate system interrupts to trigger servicing of flash arrays when either erase or program operations are completed, when a common interrupt service routine is desired. | | | |

NOTES:

1. When configured in one of the pulse modes, STS pulses low with a typical pulse width of 250 ns.
2. An invalid configuration code will result in both SR4 and SR5 being set.

9.0 Power and Reset

This section provides an overview of some system level considerations in regards to the flash device. This section provides a brief description of power-up, power-down, decoupling and reset design considerations.

9.1 Power-Up/Down Characteristics

In order to prevent any condition that may result in a spurious write or erase operation, it is recommended to power-up and power-down VCC and VCCQ together. It is also recommended to power-up VPEN with or slightly after VCC. Conversely, VPEN must power down with or slightly before VCC.

9.2 Power Supply Decoupling

When the device is enabled, many internal conditions change. Circuits are energized, charge pumps are switched on, and internal voltage nodes are ramped. All of this internal activities produce transient signals. The magnitude of the transient signals depends on the device and system loading. To minimize the effect of these transient signals, a 0.1 μF ceramic capacitor is required across each VCC/VSS and VCCQ signal. Capacitors should be placed as close as possible to device connections.

Additionally, for every eight flash devices, a 4.7 μF electrolytic capacitor should be placed between VCC and VSS at the power supply connection. This 4.7 μF capacitor should help overcome voltage slumps caused by PCB (printed circuit board) trace inductance.

9.3 Reset Characteristics

By holding the flash device in reset during power-up and power-down transitions, invalid bus conditions may be masked. The flash device enters reset mode when RP# is driven low. In reset, internal flash circuitry is disabled and outputs are placed in a high-impedance state. After return from reset, a certain amount of time is required before the flash device is able to perform normal operations. After return from reset, the flash device defaults to asynchronous page mode. If RP# is driven low during a program or erase operation, the program or erase operation will be aborted and the memory contents at the aborted block or address are no longer valid. See Figure 9, “AC Waveform for Reset Operation” on page 42 for detailed information regarding reset timings.

10.0 Electrical Specifications

10.1 Absolute Maximum Ratings

This datasheet contains information on new products in production. The specifications are subject to change without notice. Verify with your local Intel Sales office that you have the latest datasheet before finalizing a design. Absolute maximum ratings are shown in Table 12.

Warning: Stressing the device beyond the “Absolute Maximum Ratings” may cause permanent damage. These are stress ratings only. Operation beyond the “Operating Conditions” is not recommended and extended exposure beyond the “Operating Conditions” may affect device reliability.

Table 12. Absolute Maximum Ratings

| Parameter | Maximum Rating |
|---------------------------------|---------------------------------|
| Temperature under Bias Extended | −40 °C to +85 °C |
| Storage Temperature | −65 °C to +125 °C |
| Voltage On Any signal | −2.0 V to +5.0 V ⁽¹⁾ |
| Output Short Circuit Current | 100 mA ⁽²⁾ |

NOTES:

1. All specified voltages are with respect to GND. Minimum DC voltage is −0.5 V on input/output signals and −0.2 V on V_{CC} and V_{PEN} signals. During transitions, this level may undershoot to −2.0 V for periods <20 ns. Maximum DC voltage on input/output signals, V_{CC} , and V_{PEN} is $V_{CC} + 0.5$ V which, during transitions, may overshoot to $V_{CC} + 2.0$ V for periods <20 ns.
2. Output shorted for no more than one second. No more than one output shorted at a time.

10.2 Operating Conditions

Table 13. Temperature and V_{CC} Operating Conditions

| Symbol | Parameter | Min | Max | Unit | Test Condition |
|-----------|--|------|------|------|---------------------|
| T_A | Operating Temperature | -40 | +85 | °C | Ambient Temperature |
| V_{CC} | V_{CC1} Supply Voltage (2.7 V–3.6 V) | 2.70 | 3.60 | V | |
| V_{CCQ} | V_{CCQ} Supply Voltage (2.7 V–3.6 V) | 2.70 | 3.60 | V | |

10.3 DC Current Characteristics

Table 14. DC Current Characteristics

| Symbol | Parameter | Typ | Max | Unit | Test Conditions | Notes |
|--------------------------|--|------|----------|---------|---|-------|
| I_{LI} | Input and V_{PEN} Load Current | | ± 1 | μA | $V_{CC} = V_{CC} \text{ Max}; V_{CCQ} = V_{CCQ} \text{ Max}$ $V_{IN} = V_{CCQ} \text{ or GND}$ | 1 |
| I_{LO} | Output Leakage Current | | ± 10 | μA | $V_{CC} = V_{CC} \text{ Max}; V_{CCQ} = V_{CCQ} \text{ Max}$ $V_{IN} = V_{CCQ} \text{ or GND}$ | 1 |
| I_{CCS} | V_{CC} Standby Current | 50 | 120 | μA | CMOS Inputs, $V_{CC} = V_{CC} \text{ Max}$, Device is disabled (see Table 3, "Chip Enable Truth Table" on page 16), $RP\# = V_{CCQ} \pm 0.2 V$ | 1,2,3 |
| | | 0.71 | 2 | mA | TTL Inputs, $V_{CC} = V_{CC} \text{ Max}$, Device is disabled (see Table 3), $RP\# = V_{IH}$ | |
| I_{CCD} | V_{CC} Power-Down Current | 50 | 120 | μA | $RP\# = GND \pm 0.2 V, I_{OUT} (STS) = 0 \text{ mA}$ | |
| I_{CCR} | V_{CC} Page Mode Read Current | 15 | 20 | mA | CMOS Inputs, $V_{CC} = V_{CC} \text{ Max}, V_{CCQ} =$ $V_{CCQ} \text{ Max}$ using standard 4 word page mode reads. Device is enabled (see Table 3) $f = 5 \text{ MHz}, I_{OUT} = 0 \text{ mA}$ | 1,3 |
| | | 24 | 29 | mA | CMOS Inputs, $V_{CC} = V_{CC} \text{ Max}, V_{CCQ} =$ $V_{CCQ} \text{ Max}$ using standard 4 word page mode reads. Device is enabled (see Table 3) $f = 33 \text{ MHz}, I_{OUT} = 0 \text{ mA}$ | |
| I_{CCW} | V_{CC} Program or Set Lock-Bit Current | 35 | 60 | mA | CMOS Inputs, $V_{PEN} = V_{CC}$ | 1,4 |
| | | 40 | 70 | mA | TTL Inputs, $V_{PEN} = V_{CC}$ | |
| I_{CCE} | V_{CC} Block Erase or Clear Block Lock-Bits Current | 35 | 70 | mA | CMOS Inputs, $V_{PEN} = V_{CC}$ | 1,4 |
| | | 40 | 80 | mA | TTL Inputs, $V_{PEN} = V_{CC}$ | |
| I_{CCWS} I_{CCES} | V_{CC} Program Suspend or Block Erase Suspend Current | | 10 | mA | Device is enabled (see Table 3) | 1,5 |

NOTES:

1. All currents are in RMS unless otherwise noted. These currents are valid for all product versions (packages and speeds). Contact Intel's Application Support Hotline or your local sales office for information about typical specifications.
2. Includes STS.
3. CMOS inputs are either $V_{CC} \pm 0.2 V$ or $GND \pm 0.2 V$. TTL inputs are either V_{IL} or V_{IH} .
4. Sampled, not 100% tested.
5. I_{CCWS} and I_{CCES} are specified with the device selected. If the device is read or written while in erase suspend mode, the device's current draw is I_{CCR} and I_{CCWS} .

10.4 DC Voltage Characteristics

Table 15. DC Voltage Characteristics

| Symbol | Parameter | Typ | Max | Unit | Test Conditions | Notes |
|--------------------|--|----------------------------|---------------------------|------|--|-------|
| V _{IL} | Input Low Voltage | -0.5 | 0.8 | V | | 2 |
| V _{IH} | Input High Voltage | 2.0 | V _{CCQ} + 0.5 | V | | 2 |
| V _{OL} | Output Low Voltage | | 0.4 | V | V _{CCQ} = V _{CCQ} Min I _{OL} = 2 mA | 1,2 |
| | | | 0.2 | V | V _{CCQ} = V _{CCQ} Min I _{OL} = 100 μA | |
| V _{OH} | Output High Voltage | 0.85 × V _{CCQ} | | V | V _{CCQ} = V _{CCQ} Min I _{OH} = -2.5 mA | 1,2 |
| | | V _{CCQ} - 0.2 | | V | V _{CCQ} = V _{CCQ} Min I _{OH} = -100 μA | |
| V _{PENLK} | V _{PEN} Lockout during Program, Erase and Lock-Bit Operations | | 2.2 | V | | 2,3,4 |
| V _{PENH} | V _{PEN} during Block Erase, Program, or Lock-Bit Operations | 2.7 | 3.6 | V | | 3,4 |
| V _{LKO} | V _{CC} Lockout Voltage | 2.2 | | V | | 5 |

NOTES:

1. Includes STS.
2. Sampled, not 100% tested.
3. Block erases, programming, and lock-bit configurations are inhibited when V_{PEN} ≤ V_{PENLK}, and not guaranteed in the range between V_{PENLK} (max) and V_{PENH} (min), and above V_{PENH} (max).
4. Typically, V_{PEN} is connected to V_{CC} (2.7 V–3.6 V).
5. Block erases, programming, and lock-bit configurations are inhibited when V_{CC} < V_{LKO}, and not guaranteed in the range between V_{LKO} (min) and V_{CC} (min), and above V_{CC} (max).

11.0 AC Characteristics

11.1 Read Operations

Table 16. Read Operations (Sheet 1 of 2)

| Versions (All units in ns unless otherwise noted) | | | V _{CC} | 2.7 V–3.6 V ⁽³⁾ | | Notes |
|--|--------------------------------------|---|------------------|----------------------------|------|-------|
| | | | V _{CCQ} | 2.7 V–3.6 V ⁽³⁾ | | |
| # | Sym | Parameter | | Min | Max | |
| R1 | t _{AVAV} | Read/Write Cycle Time | 32 Mbit | 110 | | 1,2 |
| | | | 64 Mbit | 120 | | 1,2 |
| | | | 128 Mbit | 150 | | 1,2 |
| R2 | t _{AVQV} | Address to Output Delay | 32 Mbit | | 110 | 1,2 |
| | | | 64 Mbit | | 120 | 1,2 |
| | | | 128 Mbit | | 150 | 1,2 |
| R3 | t _{ELQV} | CE _x to Output Delay | 32 Mbit | | 110 | 1,2 |
| | | | 64 Mbit | | 120 | 1,2 |
| | | | 128 Mbit | | 150 | 1,2 |
| R4 | t _{GLQV} | OE# to Non-Array Output Delay | | | 50 | 1,2,4 |
| R5 | t _{PHQV} | RP# High to Output Delay | 32 Mbit | | 150 | 1,2 |
| | | | 64 Mbit | | 180 | 1,2 |
| | | | 128 Mbit | | 210 | 1,2 |
| R6 | t _{ELQX} | CE _x to Output in Low Z | | 0 | | 1,2,5 |
| R7 | t _{GLQX} | OE# to Output in Low Z | | 0 | | 1,2,5 |
| R8 | t _{EHQZ} | CE _x High to Output in High Z | | | 35 | 1,2,5 |
| R9 | t _{GHQZ} | OE# High to Output in High Z | | | 15 | 1,2,5 |
| R10 | t _{OH} | Output Hold from Address, CE _x , or OE# Change, Whichever Occurs First | | 0 | | 1,2,5 |
| R11 | t _{ELFL} /t _{ELFH} | CE _x Low to BYTE# High or Low | | | 10 | 1,2,5 |
| R12 | t _{FLQV} /t _{FHQV} | BYTE# to Output Delay | | | 1000 | 1,2 |
| R13 | t _{FLQZ} | BYTE# to Output in High Z | | | 1000 | 1,2,5 |
| R14 | t _{EHEL} | CE _x High to CE _x Low | | 0 | | 1,2,5 |

Table 16. Read Operations (Sheet 2 of 2)


| # | Sym | Parameter | Versions (All units in ns unless otherwise noted) | | Notes |
|-----|-------------------|---------------------------|--|----------------------------|-------|
| | | | V _{CC} | 2.7 V–3.6 V ⁽³⁾ | |
| | | | V _{CCQ} | 2.7 V–3.6 V ⁽³⁾ | |
| | | | Min | Max | |
| R15 | t _{APA} | Page Address Access Time | | 25 | 5, 6 |
| R16 | t _{GLQV} | OE# to Array Output Delay | | 25 | 4 |

NOTES:

CE_x low is defined as the first edge of CE0, CE1, or CE2 that enables the device. CE_x high is defined at the first edge of CE0, CE1, or CE2 that disables the device (see Table 3).

1. See AC Input/Output Reference Waveforms for the maximum allowable input slew rate.
2. OE# may be delayed up to t_{ELQV}–t_{GLQV} after the first edge of CE0, CE1, or CE2 that enables the device (see Table 3) without impact on t_{ELQV}.
3. See Figure 10, “Transient Input/Output Reference Waveform for VCCQ = 2.7 V–3.6 V” on page 42 and Figure 11, “Transient Equivalent Testing Load Circuit” on page 43 for testing characteristics.
4. When reading the flash array a faster t_{GLQV} (R16) applies. Non-array reads refer to Status Register reads, query reads, or device identifier reads.
5. Sampled, not 100% tested.
6. For devices configured to standard word/byte read mode, R15 (t_{APA}) will equal R2 (t_{AVQV}).

Figure 7. AC Waveform for Both Page-Mode and Standard Word/Byte Read Operations

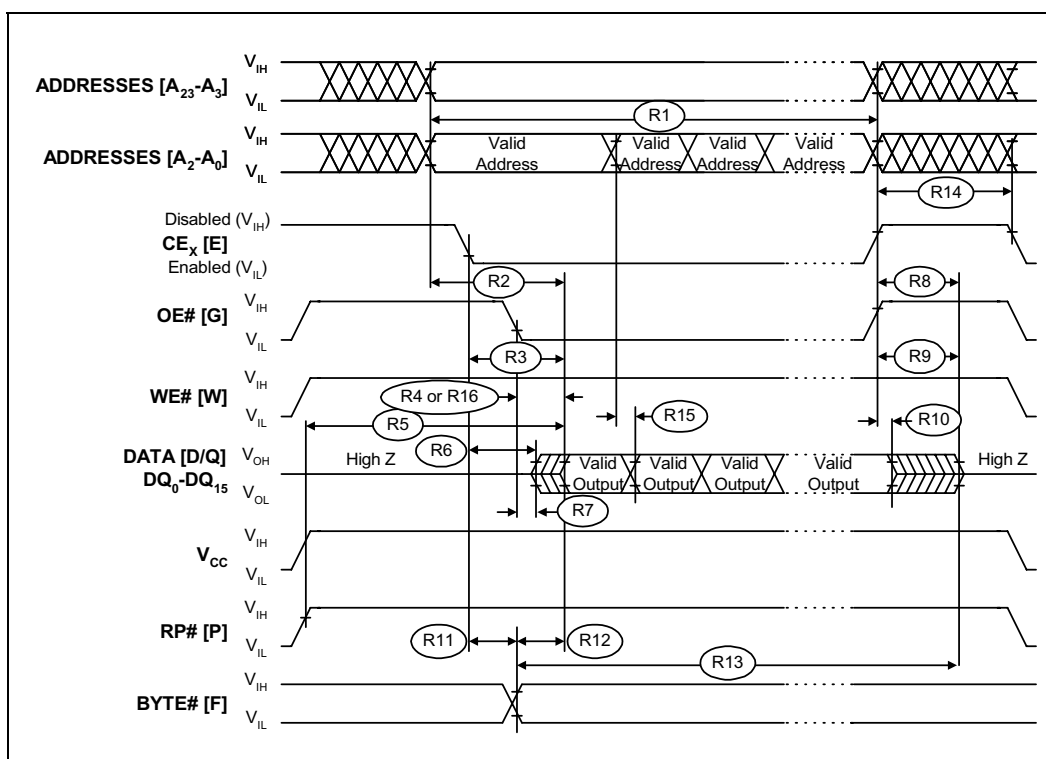

0606_16

NOTE: CE_x low is defined as the first edge of CE0, CE1, or CE2 that enables the device. CE_x high is defined at the first edge of CE0, CE1, or CE2 that disables the device (see Table 3).
 For standard word/byte read operations, R15 (t_{APA}) will equal R2 (t_{AVQV}).
 When reading the flash array a faster t_{GLQV} (R16) applies. Non-array reads refer to Status Register reads, query reads, or device identifier reads.

11.2 Write Operations

Table 17. Write Operations

| Versions | | | Valid for All Speeds | | Unit | Notes |
|----------|---------------------------|---|----------------------|-----|---------|-----------|
| # | Symbol | Parameter | Min | Max | | |
| W1 | t_{PHWL} (t_{PHEL}) | RP# High Recovery to WE# (CE_X) Going Low | 1 | | μ s | 1,2,3 |
| W2 | t_{ELWL} (t_{WLEL}) | CE_X (WE#) Low to WE# (CE_X) Going Low | 0 | | ns | 1,2,4 |
| W3 | t_{WP} | Write Pulse Width | 70 | | ns | 1,2,4 |
| W4 | t_{DVWH} (t_{DVEH}) | Data Setup to WE# (CE_X) Going High | 50 | | ns | 1,2,5 |
| W5 | t_{AVWH} (t_{AVEH}) | Address Setup to WE# (CE_X) Going High | 55 | | ns | 1,2,5 |
| W6 | t_{WHEH} (t_{EHWH}) | CE_X (WE#) Hold from WE# (CE_X) High | 0 | | ns | 1,2, |
| W7 | t_{WHDH} (t_{EHDX}) | Data Hold from WE# (CE_X) High | 0 | | ns | 1,2, |
| W8 | t_{WHAX} (t_{EHAX}) | Address Hold from WE# (CE_X) High | 0 | | ns | 1,2, |
| W9 | t_{WPH} | Write Pulse Width High | 30 | | ns | 1,2,6 |
| W11 | t_{VPWH} (t_{VPEH}) | V_{PEN} Setup to WE# (CE_X) Going High | 0 | | ns | 1,2,3 |
| W12 | t_{WHGL} (t_{EHGL}) | Write Recovery before Read | 35 | | ns | 1,2,7 |
| W13 | t_{WHRL} (t_{EHRL}) | WE# (CE_X) High to STS Going Low | | 500 | ns | 1,2,8 |
| W15 | t_{QVVL} | V_{PEN} Hold from Valid SRD, STS Going High | 0 | | ns | 1,2,3,8,9 |

NOTES:

CE_X low is defined as the first edge of CE_0 , CE_1 , or CE_2 that enables the device. CE_X high is defined at the first edge of CE_0 , CE_1 , or CE_2 that disables the device (see Table 3).

1. Read timing characteristics during block erase, program, and lock-bit configuration operations are the same as during read-only operations. Refer to *AC Characteristics—Read-Only Operations*.
2. A write operation can be initiated and terminated with either CE_X or WE#.
3. Sampled, not 100% tested.
4. Write pulse width (t_{WP}) is defined from CE_X or WE# going low (whichever goes low last) to CE_X or WE# going high (whichever goes high first). Hence, $t_{WP} = t_{WLWH} = t_{ELEH} = t_{WLEH} = t_{ELWH}$.
5. Refer to Table 4 for valid A_{IN} and D_{IN} for block erase, program, or lock-bit configuration.
6. Write pulse width high (t_{WPH}) is defined from CE_X or WE# going high (whichever goes high first) to CE_X or WE# going low (whichever goes low first). Hence, $t_{WPH} = t_{WHWL} = t_{EHHL} = t_{WHEL} = t_{EHWL}$.
7. For array access, t_{AVQV} is required in addition to t_{WHGL} for any accesses after a write.
8. STS timings are based on STS configured in its RY/BY# default mode.
9. V_{PEN} should be held at V_{PENH} until determination of block erase, program, or lock-bit configuration success ($SR[1,3,4:5] = 0$).

11.3 Block Erase, Program, and Lock-Bit Configuration Performance


Table 18. Configuration Performance

| # | Sym | Parameter | Typ | Max ⁽⁸⁾ | Unit | Notes |
|-----|----------------------------|---|-----|--------------------|------|---------------|
| W16 | | Write Buffer Byte Program Time (Time to Program 32 bytes/16 words) | 218 | 654 | μs | 1,2,3,4,5,6,7 |
| W16 | t_{WHQV3} t_{EHQV3} | Byte Program Time (Using Word/Byte Program Command) | 210 | 630 | μs | 1,2,3,4 |
| | | Block Program Time (Using Write to Buffer Command) | 0.8 | 2.4 | sec | 1,2,3,4 |
| W16 | t_{WHQV4} t_{EHQV4} | Block Erase Time | 1.0 | 5.0 | sec | 1,2,3,4 |
| W16 | t_{WHQV5} t_{EHQV5} | Set Lock-Bit Time | 64 | 75/85 | μs | 1,2,3,4,9 |
| W16 | t_{WHQV6} t_{EHQV6} | Clear Block Lock-Bits Time | 0.5 | 0.70/1.4 | sec | 1,2,3,4,10 |
| W16 | t_{WHRH1} t_{EHRH1} | Program Suspend Latency Time to Read | 25 | 75/90 | μs | 1,2,3,9 |
| W16 | t_{WHRH} t_{EHRH} | Erase Suspend Latency Time to Read | 26 | 35/40 | μs | 1,2,3,9 |

NOTES:

1. Typical values measured at $T_A = +25\text{ }^\circ\text{C}$ and nominal voltages. Assumes corresponding lock-bits are not set. Subject to change based on device characterization.
2. These performance numbers are valid for all speed versions.
3. Sampled but not 100% tested.
4. Excludes system-level overhead.
5. These values are valid when the buffer is full, and the start address is aligned on a 32-byte boundary.
6. Effective per-byte program time (t_{WHQV1} , t_{EHQV1}) is 6.8 μs/byte (typical).
7. Effective per-word program time (t_{WHQV2} , t_{EHQV2}) is 13.6 μs/word (typical).
8. Max values are measured at worst case temperature and V_{CC} corner after 100k cycles (except as noted).
9. Max values are expressed at $-25\text{ }^\circ\text{C}/-40\text{ }^\circ\text{C}$.
10. Max values are expressed at $25\text{ }^\circ\text{C}/-40\text{ }^\circ\text{C}$.

Figure 8. AC Waveform for Write Operations

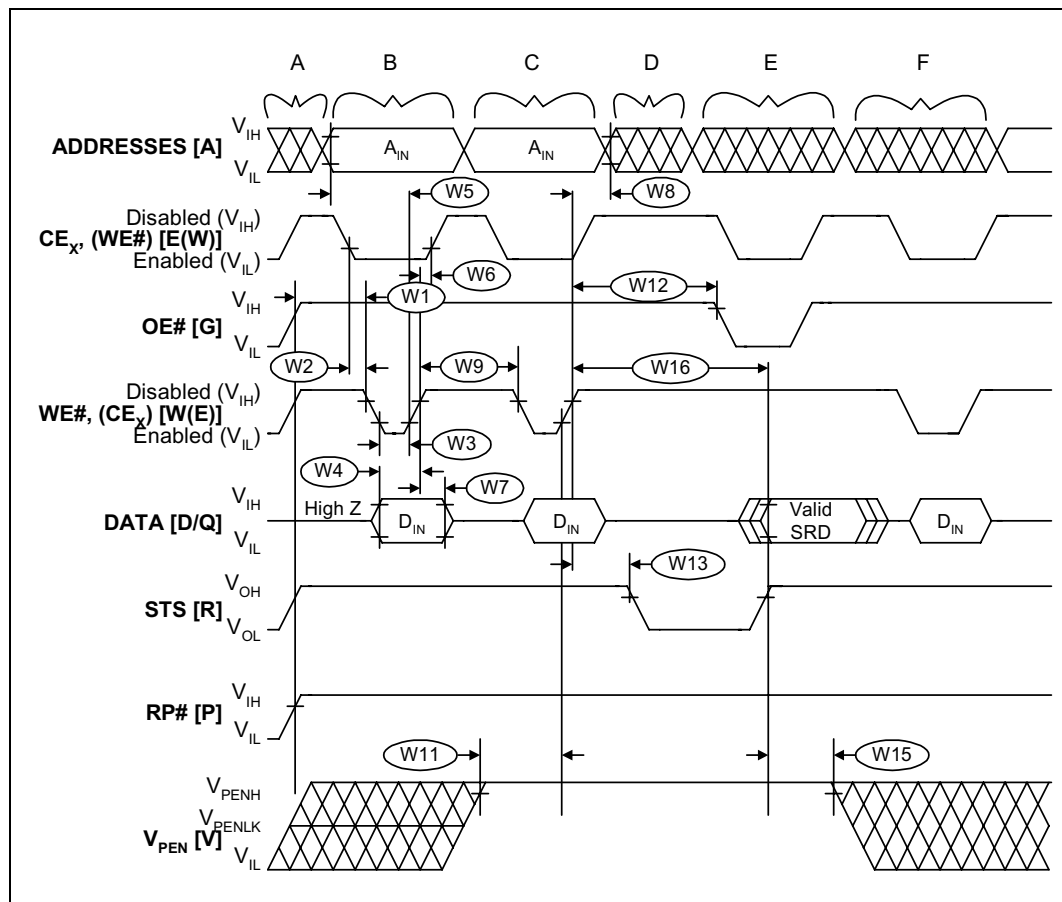

0606_17

NOTES:


CE_x low is defined as the first edge of CE0, CE1, or CE2 that enables the device. CE_x high is defined at the first edge of CE0, CE1, or CE2 that disables the device (see Table 3).

STS is shown in its default mode (RY/BY#).

- a. V_{CC} power-up and standby.
- b. Write block erase, write buffer, or program setup.
- c. Write block erase or write buffer confirm, or valid address and data.
- d. Automated erase delay.
- e. Read Status Register or query data.
- f. Write Read Array command.

11.4 Reset Operation

Figure 9. AC Waveform for Reset Operation

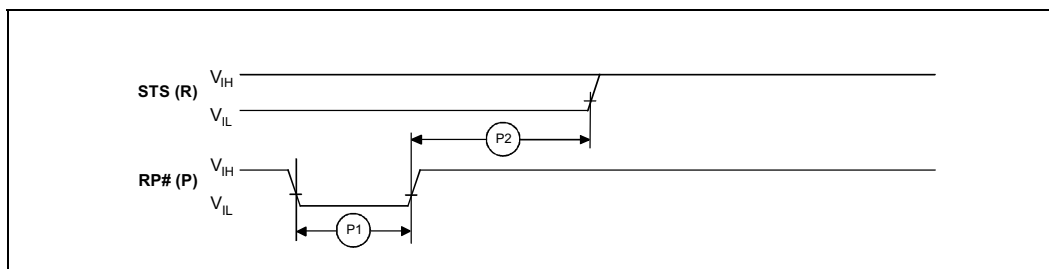

0606_18

NOTE: STS is shown in its default mode (RY/BY#).

Table 19. Reset Specifications


| # | Sym | Parameter | Min | Max | Unit | Notes |
|----|------------|---|-----|-----|---------|-------|
| P1 | t_{PLPH} | RP# Pulse Low Time (If RP# is tied to V_{CC} , this specification is not applicable) | 35 | | μs | 1,2 |
| P2 | t_{PHRH} | RP# High to Reset during Block Erase, Program, or Lock-Bit Configuration | | 100 | ns | 1,3 |

NOTES:

1. These specifications are valid for all product versions (packages and speeds).
2. If RP# is asserted while a block erase, program, or lock-bit configuration operation is not executing then the minimum required RP# Pulse Low Time is 100 ns.
3. A reset time, t_{PHQV} , is required from the latter of STS (in RY/BY# mode) or RP# going high until outputs are valid.


11.5 AC Test Conditions

Figure 10. Transient Input/Output Reference Waveform for $V_{CCQ} = 2.7 V - 3.6 V$

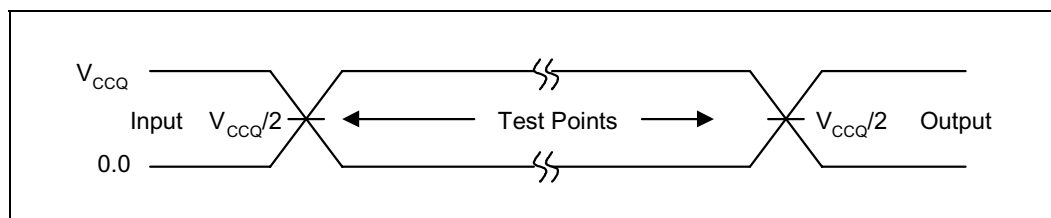

NOTE: AC test inputs are driven at V_{CCQ} for a Logic "1" and 0.0 V for a Logic "0." Input timing begins, and output timing ends, at $V_{CCQ}/2$ V (50% of V_{CCQ}). Input rise and fall times (10% to 90%) < 5 ns.

Figure 11. Transient Equivalent Testing Load Circuit

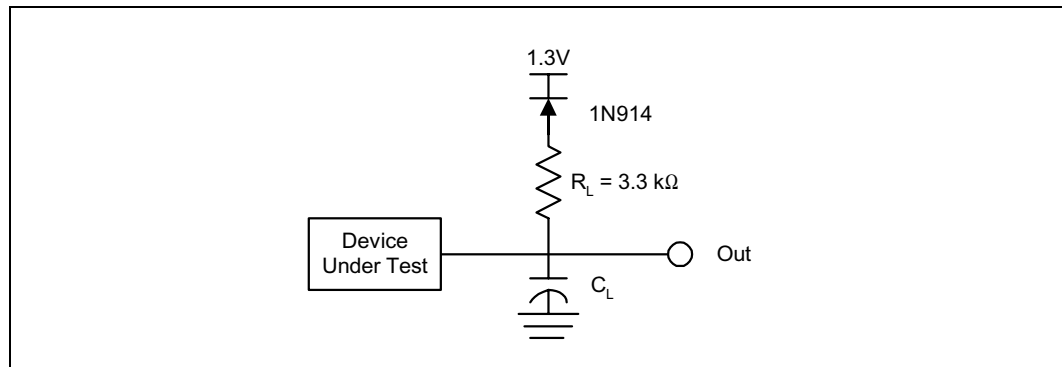

NOTE: C_L Includes Jig Capacitance

| Test Configuration | C_L (pF) |
|--|------------|
| $V_{CCQ} = V_{CC} = 2.7\text{ V} - 3.6\text{ V}$ | 30 |

11.6 Capacitance

$T_A = +25\text{ }^\circ\text{C}$, $f = 1\text{ MHz}$

| Symbol | Parameter ⁽¹⁾ | Type | Max | Unit | Condition |
|-----------|--------------------------|------|-----|------|--------------------------|
| C_{IN} | Input Capacitance | 6 | 8 | pF | $V_{IN} = 0.0\text{ V}$ |
| C_{OUT} | Output Capacitance | 8 | 12 | pF | $V_{OUT} = 0.0\text{ V}$ |

NOTES:

1. Sampled, not 100% tested.

Appendix A Write State Machine (WSM)

A.1 TBD

Appendix B Common Flash Interface

The Common Flash Interface(CFI) specification outlines device and host system software interrogation handshake which allows specific vendor-specified software algorithms to be used for entire families of devices. This allows device independent, JEDEC ID-independent, and forward- and backward-compatible software support for the specified flash device families. It allows flash vendors to standardize their existing interfaces for long-term compatibility.

This appendix defines the data structure or “database” returned by the Common Flash Interface (CFI) Query command. System software should parse this structure to gain critical information such as block size, density, x8/x16, and electrical specifications. Once this information has been obtained, the software will know which command sets to use to enable flash writes, block erases, and otherwise control the flash component. The Query is part of an overall specification for multiple command set and control interface descriptions called Common Flash Interface, or CFI.

B.1 Query Structure Output

The Query “database” allows system software to gain information for controlling the flash component. This section describes the device’s CFI-compliant interface that allows the host system to access Query data.

Query data are always presented on the lowest-order data outputs (D[7:0]) only. The numerical offset value is the address relative to the maximum bus width supported by the device. On this family of devices, the Query table device starting address is a 10h, which is a word address for x16 devices.

For a word-wide (x16) device, the first two bytes of the Query structure, “Q” and “R” in ASCII, appear on the low byte at word addresses 10h and 11h. This CFI-compliant device outputs 00H data on upper bytes. Thus, the device outputs ASCII “Q” in the low byte (D[7:0]) and 00h in the high byte (D[15:8]).

At Query addresses containing two or more bytes of information, the least significant data byte is presented at the lower address, and the most significant data byte is presented at the higher address.

In all of the following tables, addresses and data are represented in hexadecimal notation, so the “h” suffix has been dropped. In addition, since the upper byte of word-wide devices is always “00h,” the leading “00” has been dropped from the table notation and only the lower byte value is shown. Any x16 device outputs can be assumed to have 00h on the upper byte in this mode.

Table 20. Summary of Query Structure Output as a Function of Device and Mode

| Device Type/ Mode | Query start location in maximum device bus width addresses | Query data with maximum device bus width addressing | | | Query data with byte addressing | | |
|------------------------|--|---|----------|-------------|---------------------------------|----------|-------------|
| | | Hex Offset | Hex Code | ASCII Value | Hex Offset | Hex Code | ASCII Value |
| x16 device x16 mode | 10h | 10: | 0051 | "Q" | 20: | 51 | "Q" |
| | | 11: | 0052 | "R" | 21: | 00 | "Null" |
| | | 12: | 0059 | "Y" | 22: | 52 | "R" |
| x16 device x8 mode | N/A ⁽¹⁾ | N/A ⁽¹⁾ | | | 20: | 51 | "Q" |
| | | | | | 21: | 51 | "Q" |
| | | | | | 22: | 52 | "R" |

NOTE:

1. The system must drive the lowest order addresses to access all the device's array data when the device is configured in x8 mode. Therefore, word addressing, where these lower addresses are not toggled by the system, is "Not Applicable" for x8-configured devices.

Table 21. Example of Query Structure Output of a x16- and x8-Capable Device

| Word Addressing | | | Byte Addressing | | |
|---------------------------------|---------------------------------|-----------|--------------------------------|--------------------------------|----------|
| Offset | Hex Code | Value | Offset | Hex Code | Value |
| A ₁₅ -A ₀ | D ₁₅ -D ₀ | | A ₇ -A ₀ | D ₇ -D ₀ | |
| 0010h | 0051 | "Q" | 20h | 51 | "Q" |
| 0011h | 0052 | "R" | 21h | 51 | "Q" |
| 0012h | 0059 | "Y" | 22h | 52 | "R" |
| 0013h | P_ID _{LO} | PrVendor | 23h | 52 | "R" |
| 0014h | P_ID _{HI} | ID # | 24h | 59 | "Y" |
| 0015h | P _{LO} | PrVendor | 25h | 59 | "Y" |
| 0016h | P _{HI} | TblAdr | 26h | P_ID _{LO} | PrVendor |
| 0017h | A_ID _{LO} | AltVendor | 27h | P_ID _{LO} | ID # |
| 0018h | A_ID _{HI} | ID # | 28h | P_ID _{HI} | ID # |
| ... | ... | ... | ... | ... | ... |

B.2 Query Structure Overview

The Query command causes the flash component to display the Common Flash Interface (CFI) Query structure or "database." The structure sub-sections and address locations are summarized below. See *AP-646 Common Flash Interface (CFI) and Command Sets* (order number 292204) for a full description of CFI.

The following sections describe the Query structure sub-sections in detail.

Table 22. Query Structure

| Offset | Sub-Section Name | Description | Notes |
|------------------------|---|--|-------|
| 00h | | Manufacturer Code | 1 |
| 01h | | Device Code | 1 |
| (BA+2)h ⁽²⁾ | Block Status Register | Block-Specific Information | 1,2 |
| 04-0Fh | Reserved | <i>Reserved for Vendor-Specific Information</i> | 1 |
| 10h | CFI Query Identification String | <i>Reserved for Vendor-Specific Information</i> | 1 |
| 1Bh | System Interface Information | Command Set ID and Vendor Data Offset | 1 |
| 27h | Device Geometry Definition | Flash Device Layout | 1 |
| P ⁽³⁾ | Primary Intel-Specific Extended Query Table | Vendor-Defined Additional Information Specific to the Primary Vendor Algorithm | 1,3 |

NOTES:

1. Refer to the Query Structure Output section and offset 28h for the detailed definition of offset address as a function of device bus width and mode.
2. BA = Block Address beginning location (i.e., 02000h is block 2's beginning location when the block size is 128 Kbyte).
3. Offset 15 defines "P" which points to the *Primary Intel-Specific Extended Query Table*.

B.3 Block Status Register

The block status register indicates whether an erase operation completed successfully or whether a given block is locked or can be accessed for flash program/erase operations.

Table 23. Block Status Register

| Offset | Length | Description | Address | Value |
|------------------------|--------|---|---------|-----------------|
| (BA+2)h ⁽¹⁾ | 1 | Block Lock Status Register | BA+2: | --00 or --01 |
| | | BSR.0 Block Lock Status 0 = Unlocked 1 = Locked | BA+2: | (bit 0): 0 or 1 |
| | | BSR 1–7: <i>Reserved for Future Use</i> | BA+2: | (bit 1–7): 0 |

NOTE:

1. BA = The beginning location of a Block Address (i.e., 008000h is block 1's (64-KB block) beginning location in word mode).

B.4 CFI Query Identification String

The CFI Query Identification String provides verification that the component supports the Common Flash Interface specification. It also indicates the specification version and supported vendor-specified command set(s).

Table 24. CFI Identification (Sheet 1 of 2)

| Offset | Length | Description | Add. | Hex Code | Value |
|--------|--------|---|-------------------|----------------------|-------------------|
| 10h | 3 | Query-unique ASCII string "QRY" | 10: 11: 12: | --51 --52 --59 | "Q" "R" "Y" |
| 13h | 2 | Primary vendor command set and control interface ID code. 16-bit ID code for vendor-specified algorithms | 13: 14: | --01 --00 | |
| 15h | 2 | Extended Query Table primary algorithm address | 15: 16: | --31 --00 | |
| 17h | 2 | Alternate vendor command set and control interface ID code. | 17: | --00 | |

Table 24. CFI Identification (Sheet 2 of 2)

| Offset | Length | Description | Add. | Hex Code | Value |
|--------|--------|--|------------|--------------|-------|
| | | 0000h means no second vendor-specified algorithm exists | 18: | --00 | |
| 19h | 2 | Secondary algorithm Extended Query Table address. 0000h means none exists | 19: 1A: | --00 --00 | |

B.5 System Interface Information

The following device information can optimize system interface software.

Table 25. System Interface Information

| Offset | Length | Description | Add. | Hex Code | Value |
|--------|--------|---|------|----------|--------|
| 1Bh | 1 | V _{CC} logic supply minimum program/erase voltage bits 0–3 BCD 100 mV bits 4–7 BCD volts | 1B: | --27 | 2.7 V |
| 1Ch | 1 | V _{CC} logic supply maximum program/erase voltage bits 0–3 BCD 100 mV bits 4–7 BCD volts | 1C: | --36 | 3.6 V |
| 1Dh | 1 | V _{PP} [programming] supply minimum program/erase voltage bits 0–3 BCD 100 mV bits 4–7 HEX volts | 1D: | --00 | 0.0 V |
| 1Eh | 1 | V _{PP} [programming] supply maximum program/erase voltage bits 0–3 BCD 100 mV bits 4–7 HEX volts | 1E: | --00 | 0.0 V |
| 1Fh | 1 | "n" such that typical single word program time-out = 2 ⁿ μs | 1F: | --07 | 128 μs |
| 20h | 1 | "n" such that typical max. buffer write time-out = 2 ⁿ μs | 20: | --07 | 128 μs |
| 21h | 1 | "n" such that typical block erase time-out = 2 ⁿ ms | 21: | --0A | 1 s |
| 22h | 1 | "n" such that typical full chip erase time-out = 2 ⁿ ms | 22: | --00 | NA |
| 23h | 1 | "n" such that maximum word program time-out = 2 ⁿ times typical | 23: | --04 | 2 ms |
| 24h | 1 | "n" such that maximum buffer write time-out = 2 ⁿ times typical | 24: | --04 | 2 ms |
| 25h | 1 | "n" such that maximum block erase time-out = 2 ⁿ times typical | 25: | --04 | 16 s |
| 26h | 1 | "n" such that maximum chip erase time-out = 2 ⁿ times typical | 26: | --00 | NA |

B.6 Device Geometry Definition

This field provides critical details of the flash device geometry.

Table 26. Device Geometry Definition (Sheet 1 of 2)

| Offset | Length | Description | Code See Table Below | | |
|--------|--------|---|----------------------|------|------------|
| 27h | 1 | "n" such that device size = 2 ⁿ in number of bytes | 27: | | |
| 28h | 2 | Flash device interface: <u>x8_async</u> <u>x16_async</u> <u>x8/x16_async</u> 28:00,29:00 28:01,29:00 28:02,29:00 | 28: | --02 | x8/ x16 |
| 2Ah | 2 | "n" such that maximum number of bytes in write buffer = 2 ⁿ | 2A: | --05 | 32 |
| | | | 2B: | --00 | |

Table 26. Device Geometry Definition (Sheet 2 of 2)

| Offset | Length | Description | Code See Table Below | | |
|--------|--------|--|----------------------|------|---|
| 2Ch | 1 | Number of erase block regions within device: 1. x = 0 means no erase blocking; the device erases in "bulk" 2. x specifies the number of device or partition regions with one or more contiguous same-size erase blocks 3. Symmetrically blocked partitions have one blocking region 4. Partition size = (total blocks) x (individual block size) | 2C: | --01 | 1 |
| 2Dh | 4 | Erase Block Region 1 Information bits 0–15 = y, y+1 = number of identical-size erase blocks bits 16–31 = z, region erase block(s) size are z x 256 bytes | 2D: | | |
| | | | 2E: | | |
| | | | 2F: | | |
| | | | 30: | | |

Device Geometry Definition

| Address | 32 Mbit | 64 Mbit | 128 Mbit |
|---------|---------|---------|----------|
| 27: | --16 | --17 | --18 |
| 28: | --02 | --02 | --02 |
| 29: | --00 | --00 | --00 |
| 2A: | --05 | --05 | --05 |
| 2B: | --00 | --00 | --00 |
| 2C: | --01 | --01 | --01 |
| 2D: | --1F | --3F | --7F |
| 2E: | --00 | --00 | --00 |
| 2F: | --00 | --00 | --00 |
| 30: | --02 | --02 | --02 |

B.7 Primary-Vendor Specific Extended Query Table

Certain flash features and commands are optional. The *Primary Vendor-Specific Extended Query* table specifies this and other similar information.

Table 27. Primary Vendor-Specific Extended Query (Sheet 1 of 2)

| Offset ⁽¹⁾ P = 31h | Length | Description (Optional Flash Features and Commands) | Add. | Hex Code | Value |
|----------------------------------|--------|---|------|----------|-------|
| (P+0)h | 3 | Primary extended query table | 31: | --50 | "P" |
| (P+1)h | | Unique ASCII string "PRI" | 32: | --52 | "R" |
| (P+2)h | | | 33: | --49 | "I" |
| (P+3)h | 1 | Major version number, ASCII | 34: | --31 | "1" |
| (P+4)h | 1 | Minor version number, ASCII | 35: | --31 | "1" |

Table 27. Primary Vendor-Specific Extended Query (Sheet 2 of 2)

| Offset ⁽¹⁾ P = 31h | Length | Description (Optional Flash Features and Commands) | Add. | Hex Code | Value |
|--------------------------------------|--------|---|--------------------------|------------------------------|--|
| (P+5)h (P+6)h (P+7)h (P+8)h | 4 | Optional feature and command support (1=yes, 0=no) <i>bits 9–31 are reserved; undefined bits are “0.” If bit 31 is “1” then another 31 bit field of optional features follows at the end of the bit-30 field.</i> bit 0 Chip erase supported bit 1 Suspend erase supported bit 2 Suspend program supported bit 3 Legacy lock/unlock supported bit 4 Queued erase supported bit 5 Instant Individual block locking supported bit 6 Protection bits supported bit 7 Page-mode read supported bit 8 Synchronous read supported | 36: 37: 38: 39: | --0A --00 --00 --00 | No Yes Yes Yes ⁽¹⁾ No No Yes Yes No |
| (P+9)h | 1 | Supported functions after suspend: read Array, Status, Query Other supported operations are: <i>bits 1–7 reserved; undefined bits are “0”</i> bit 0 Program supported after erase suspend | 3A: | --01 | Yes |
| (P+A)h (P+B)h | 2 | Block status register mask <i>bits 2–15 are Reserved; undefined bits are “0”</i> bit 0 Block Lock-Bit Status register active bit 1 Block Lock-Down Bit Status active | 3B: 3C: | --01 --00 | Yes No |
| (P+C)h | 1 | V _{CC} logic supply highest performance program/erase voltage bits 0–3 BCD value in 100 mV bits 4–7 BCD value in volts | 3D: | --33 | 3.3 V |
| (P+D)h | 1 | V _{PP} optimum program/erase supply voltage bits 0–3 BCD value in 100 mV bits 4–7 HEX value in volts | 3E: | --00 | 0.0 V |

NOTE:

1. Future devices may not support the described “Legacy Lock/Unlock” function. Thus bit 3 would have a value of “0.”

Table 28. Protection Register Information

| Offset ⁽¹⁾ P = 31h | Length | Description (Optional Flash Features and Commands) | Add. | Hex Code | Value |
|---|--------|--|------|----------|-------|
| (P+E)h | 1 | Number of Protection register fields in JEDEC ID space. "00h," indicates that 256 protection bytes are available | 3F: | --01 | 01 |
| (P+F)h (P+10)h (P+11)h (P+12)h | 4 | Protection Field 1: Protection Description This field describes user-available One Time Programmable (OTP) protection register bytes. Some are pre-programmed with device-unique serial numbers. Others are user-programmable. Bits 0-15 point to the protection register lock byte, the section's first byte. The following bytes are factory pre-programmed and user-programmable. bits 0-7 = Lock/bytes JEDEC-plane physical low address bits 8-15 = Lock/bytes JEDEC-plane physical high address bits 16-23 = "n" such that 2 ⁿ = factory pre-programmed bytes bits 24-31 = "n" such that 2 ⁿ = user-programmable bytes | 40: | --00 | 00h |

NOTE:

1. The variable P is a pointer which is defined at CFI offset 15h.

Table 29. Burst Read Information

| Offset ⁽¹⁾ P = 31h | Length | Description (Optional Flash Features and Commands) | Add. | Hex Code | Value |
|----------------------------------|--------|--|------|----------|--------|
| (P+13)h | 1 | Page Mode Read capability bits 0-7 = "n" such that 2 ⁿ HEX value represents the number of read-page bytes. See offset 28h for device word width to determine page-mode data output width. 00h indicates no read page buffer. | 44: | --03 | 8 byte |
| (P+14)h | 1 | Number of synchronous mode read configuration fields that follow. 00h indicates no burst capability. | 45: | --00 | 0 |
| (P+15)h | | <i>Reserved for future use</i> | 46: | | |

NOTE:

1. The variable P is a pointer which is defined at CFI offset 15h.

Appendix C Flow Charts

Figure 12. Write to Buffer Flowchart


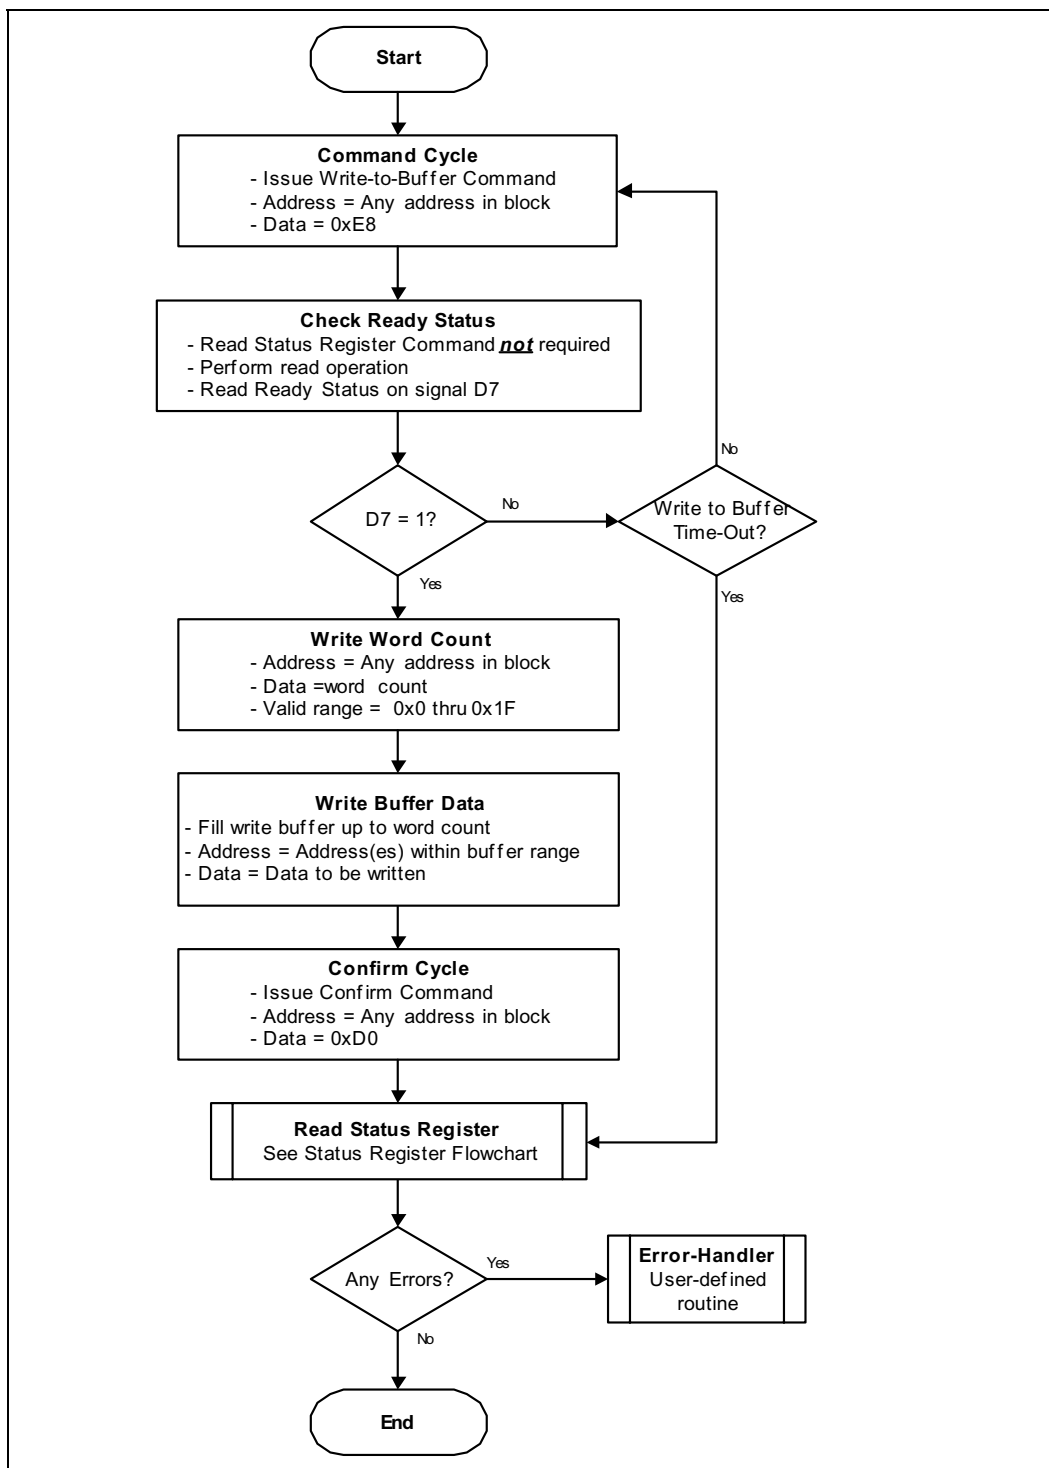


Figure 13. Status Register Flowchart

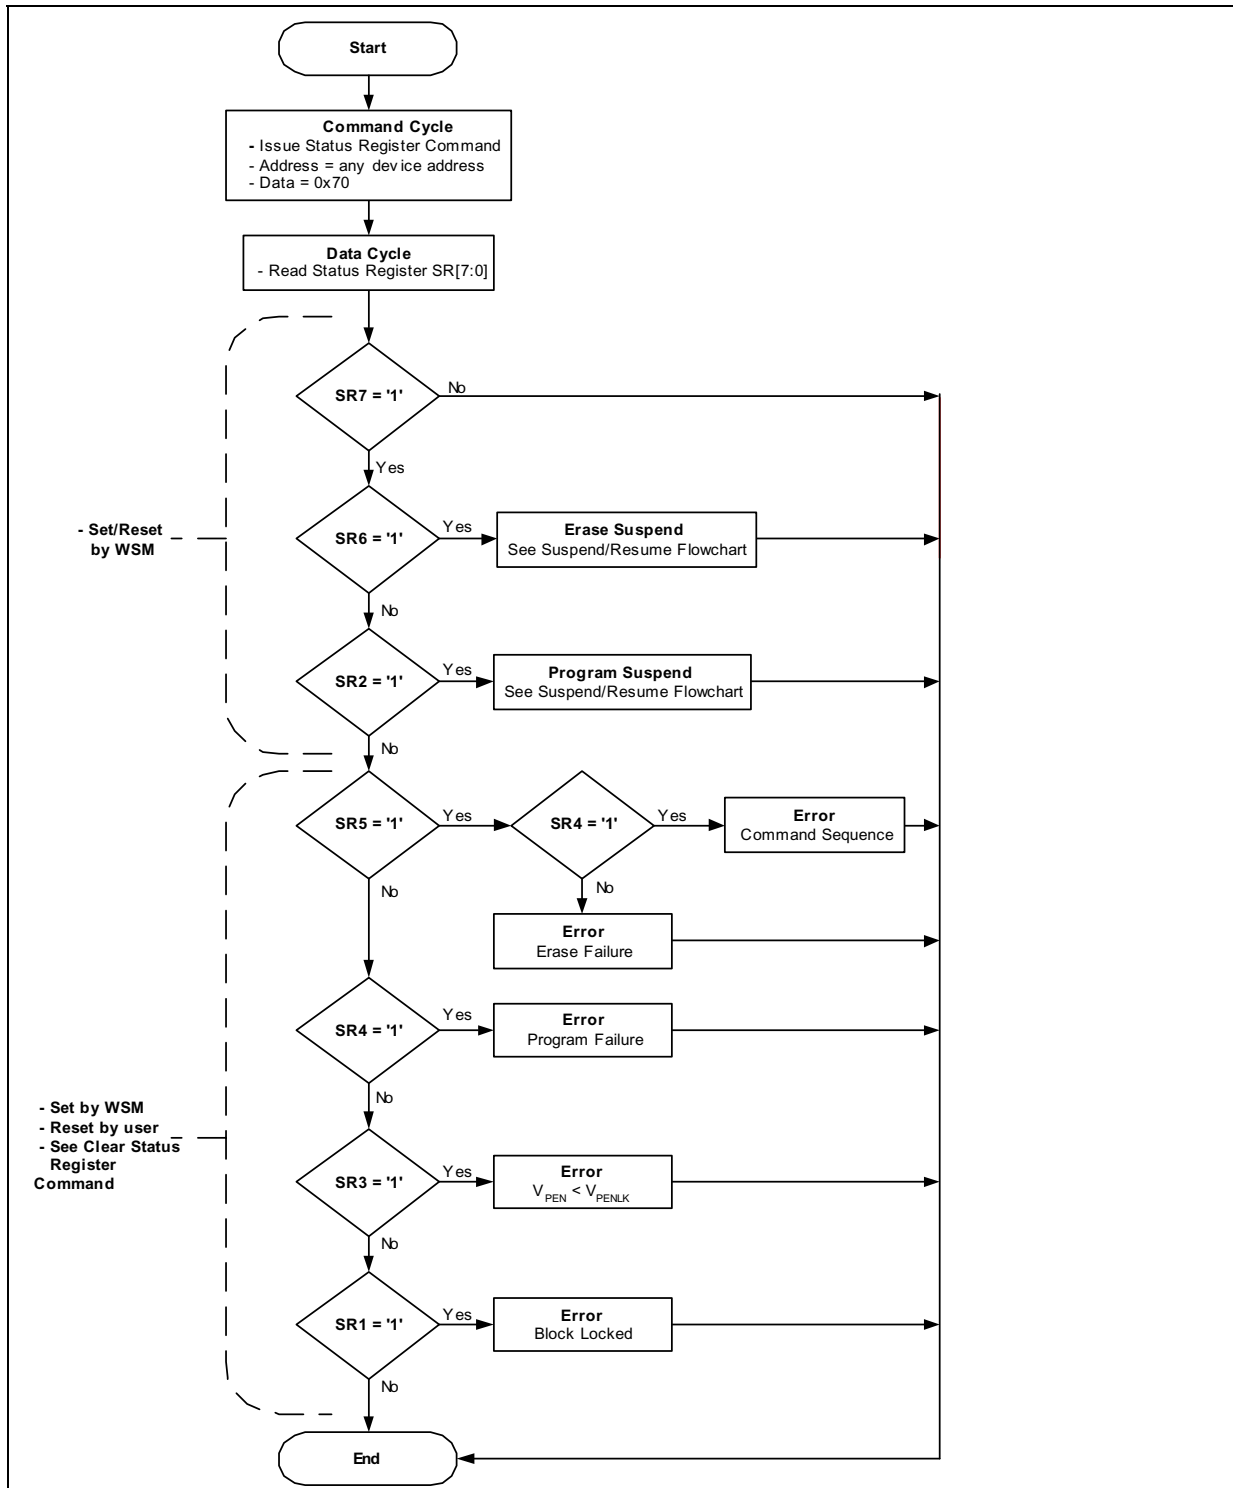

0606_07A

Figure 14. Byte/Word Program Flowchart



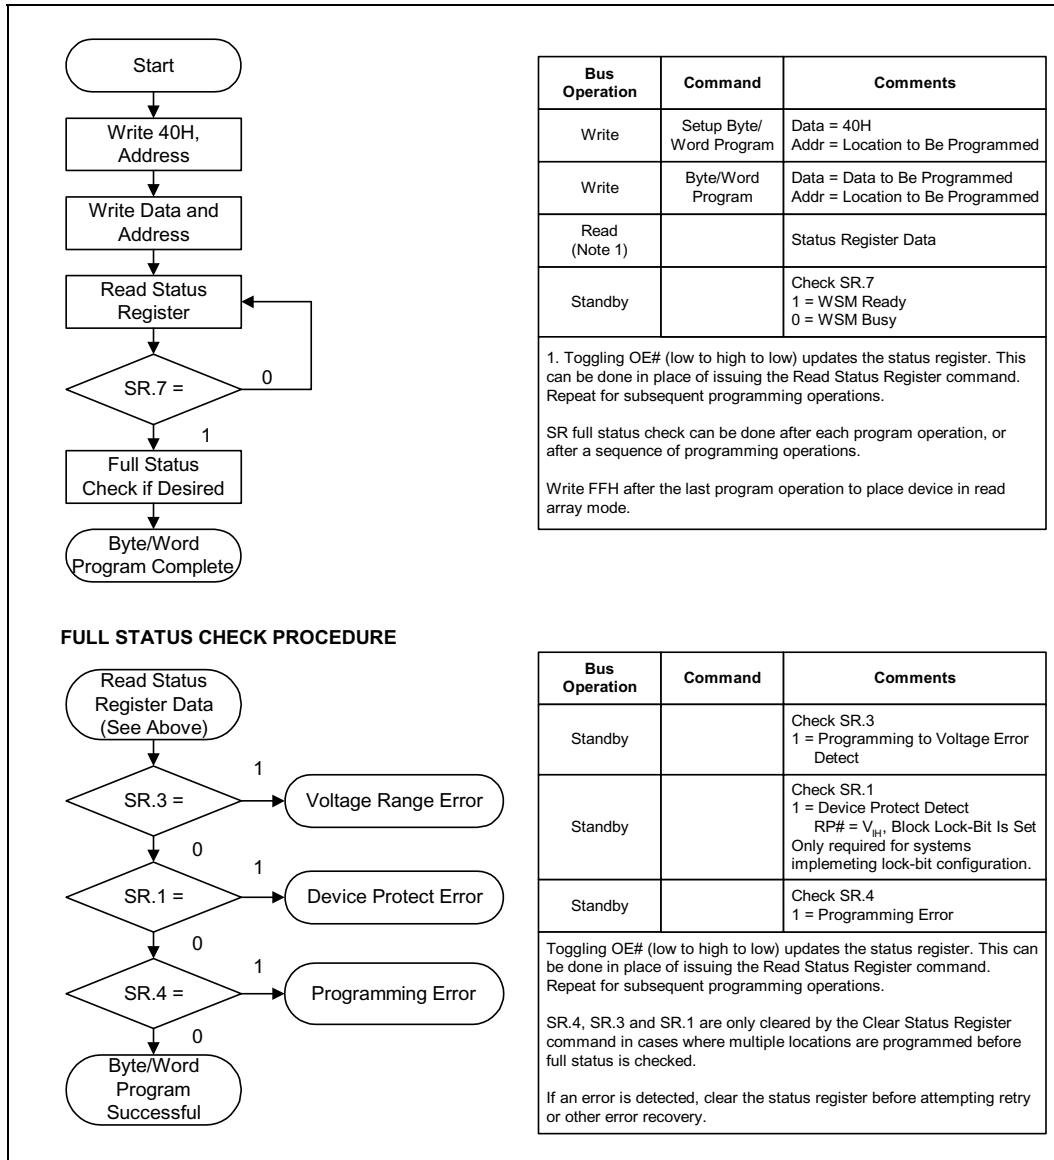


Figure 15. Program Suspend/Resume Flowchart

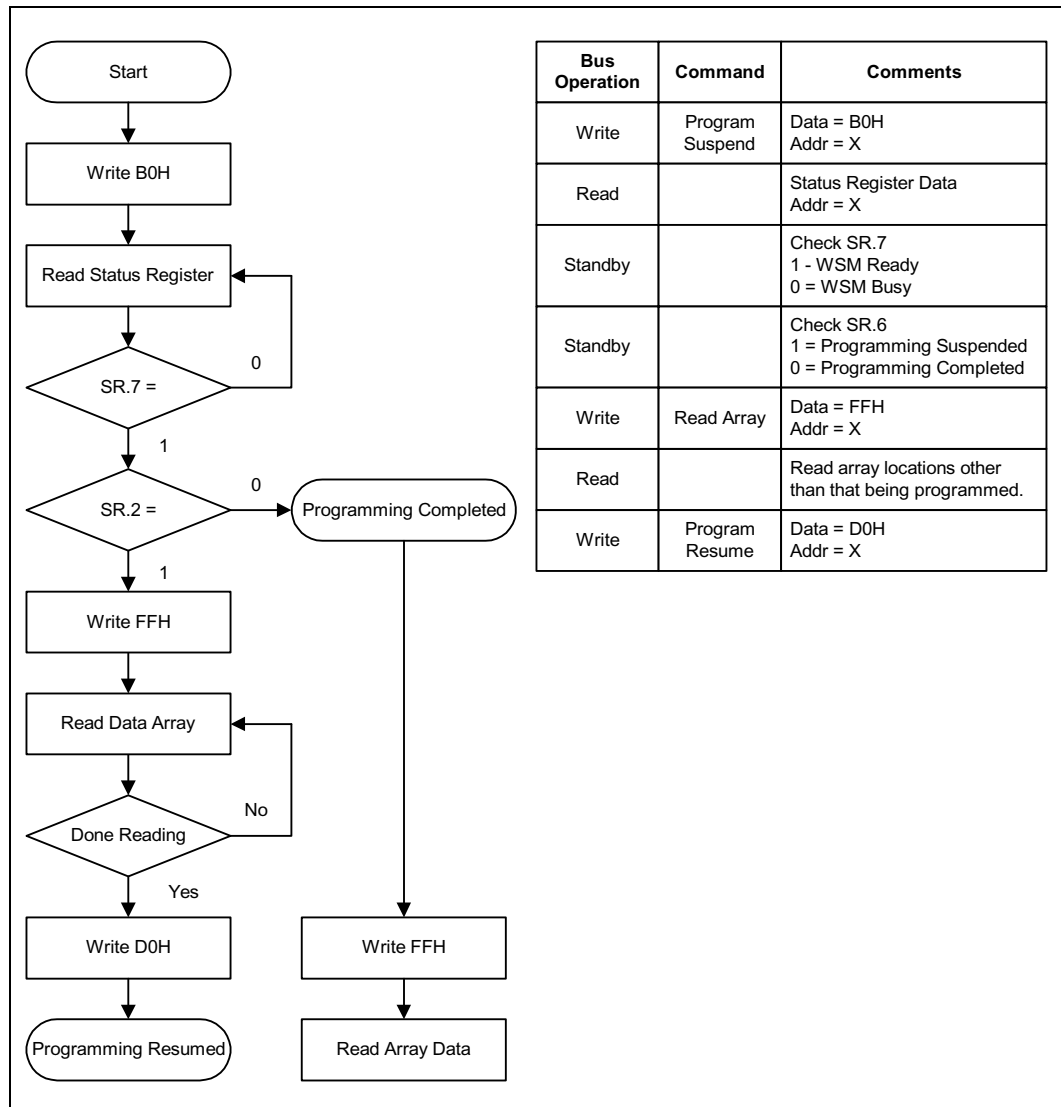


0606_08

Figure 16. Block Erase Flowchart

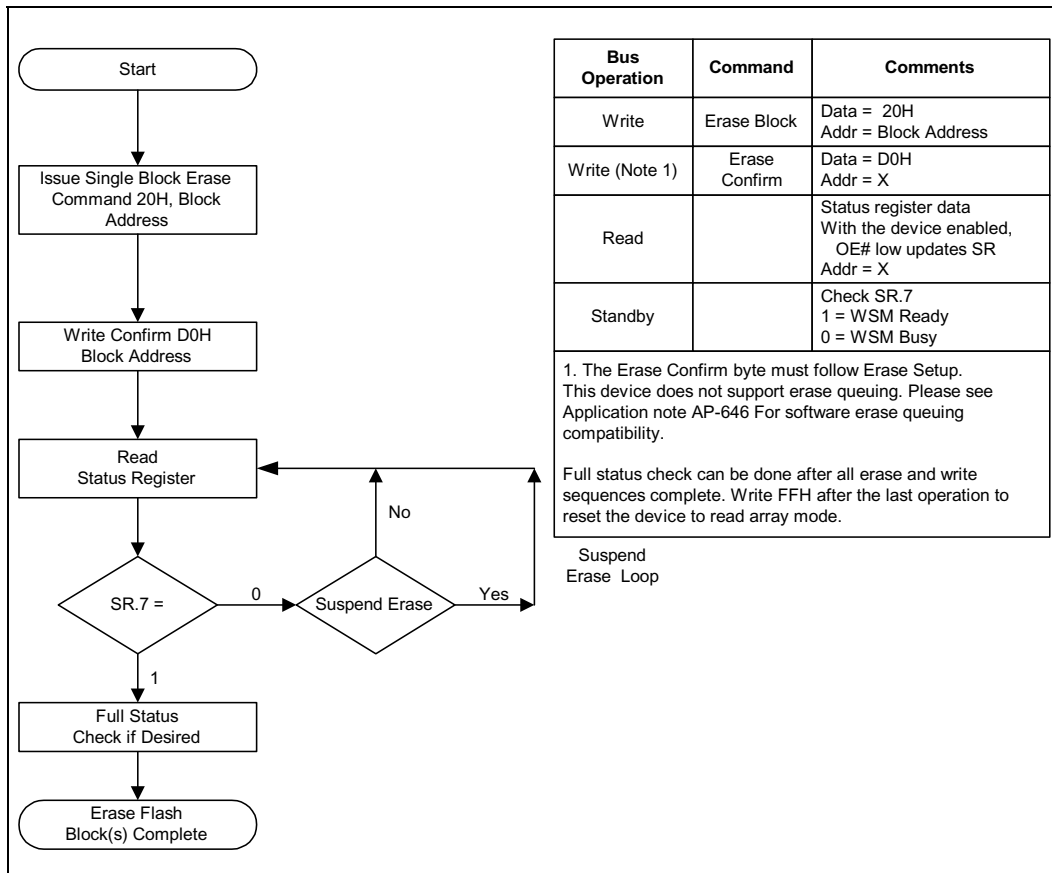


0606_09

Figure 17. Block Erase Suspend/Resume Flowchart

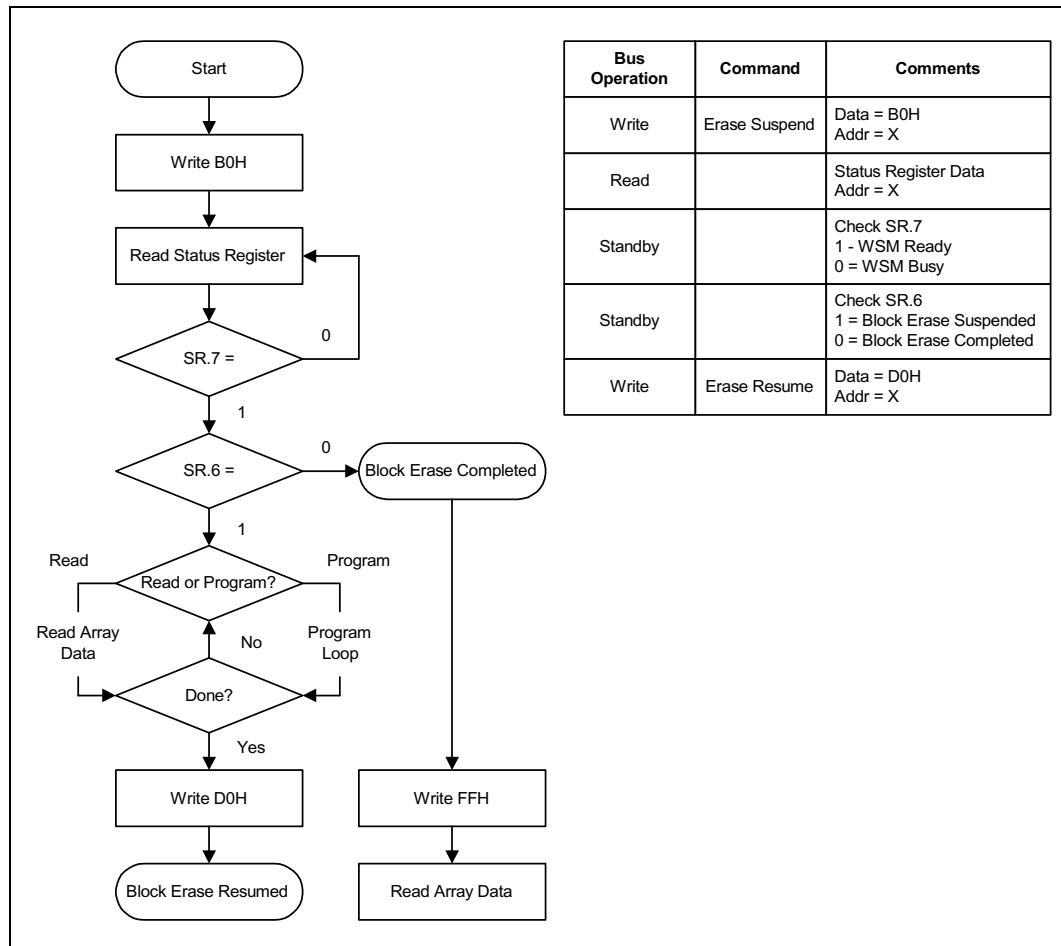


0606_10

Figure 18. Set Block Lock-Bit Flowchart

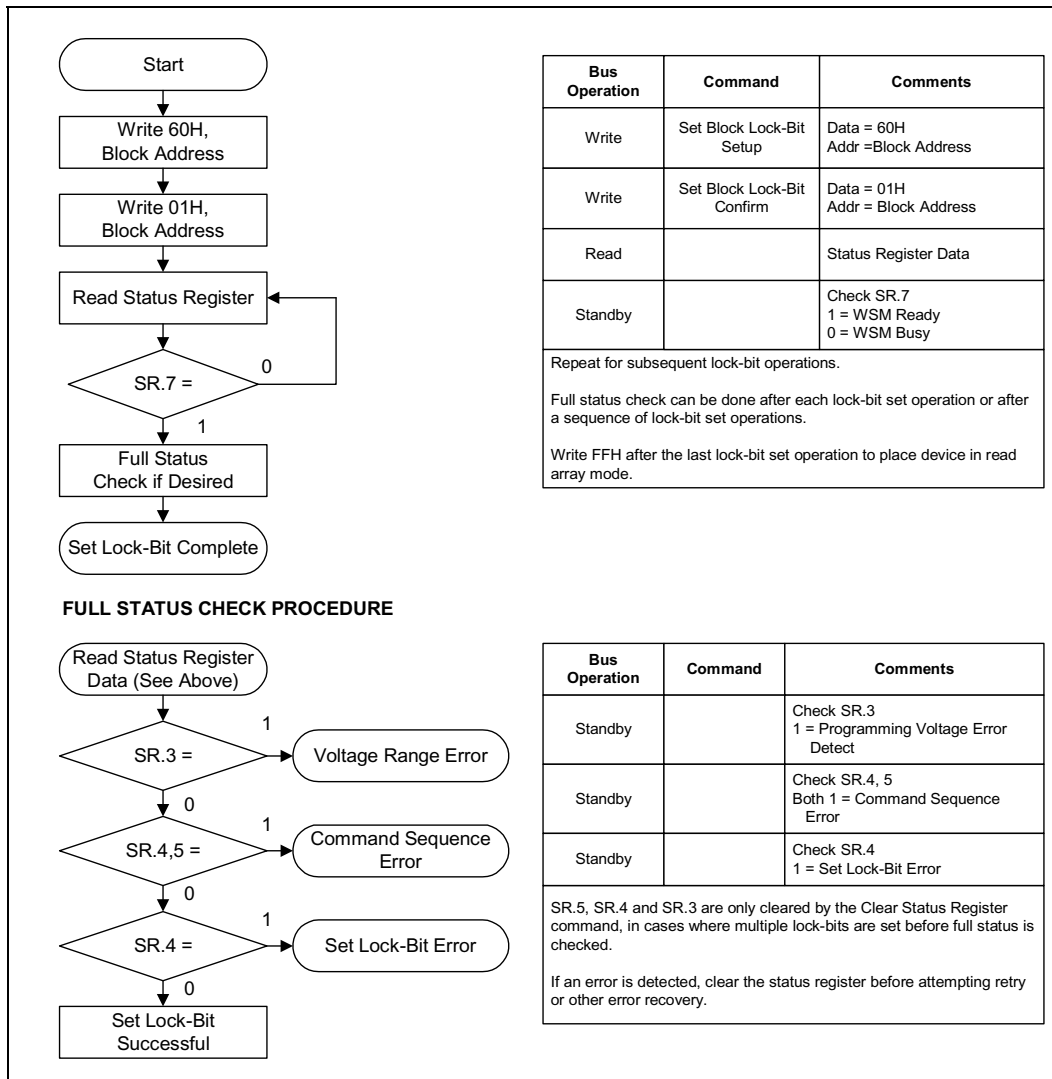


0606_11b

Figure 19. Clear Lock-Bit Flowchart

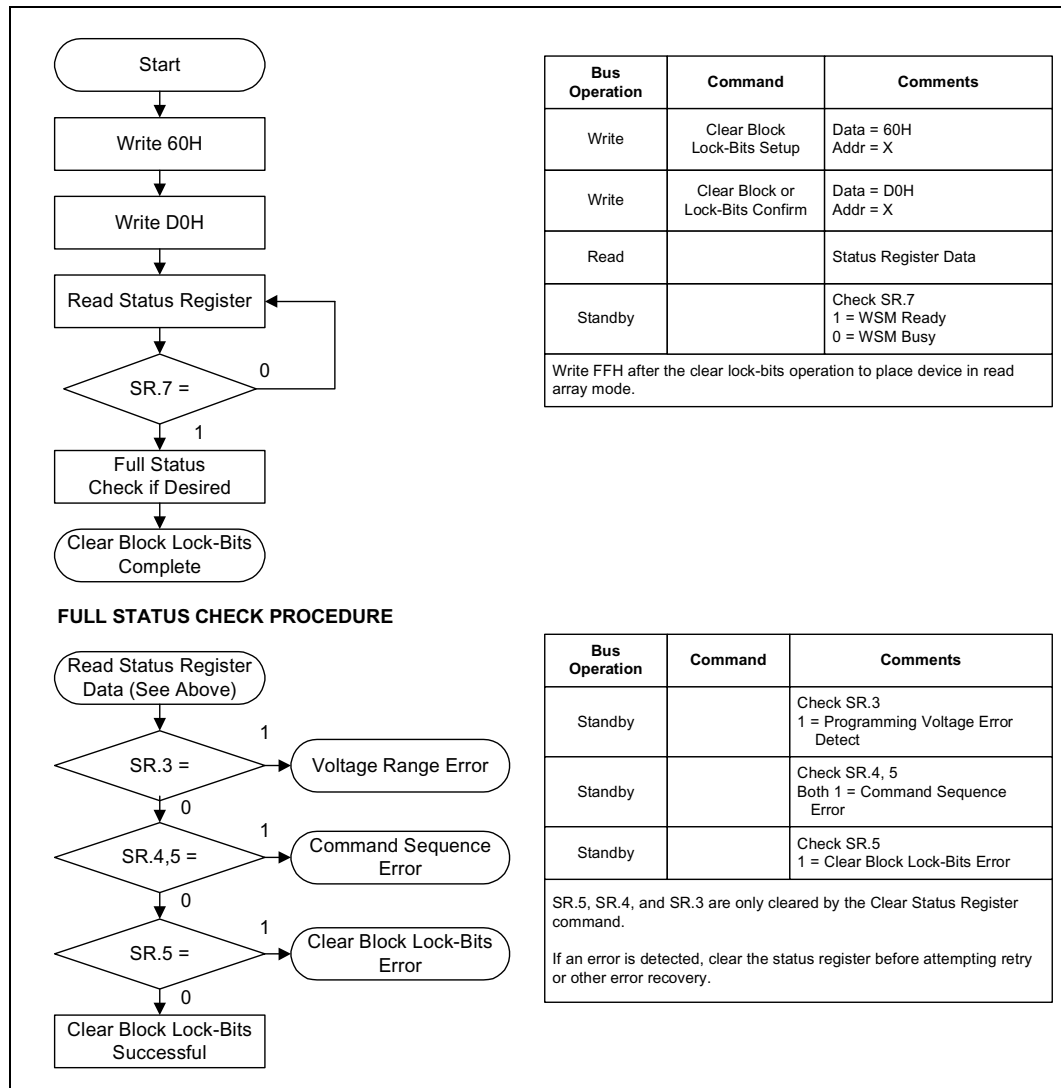

0606_12b

Figure 20. Protection Register Programming Flowchart

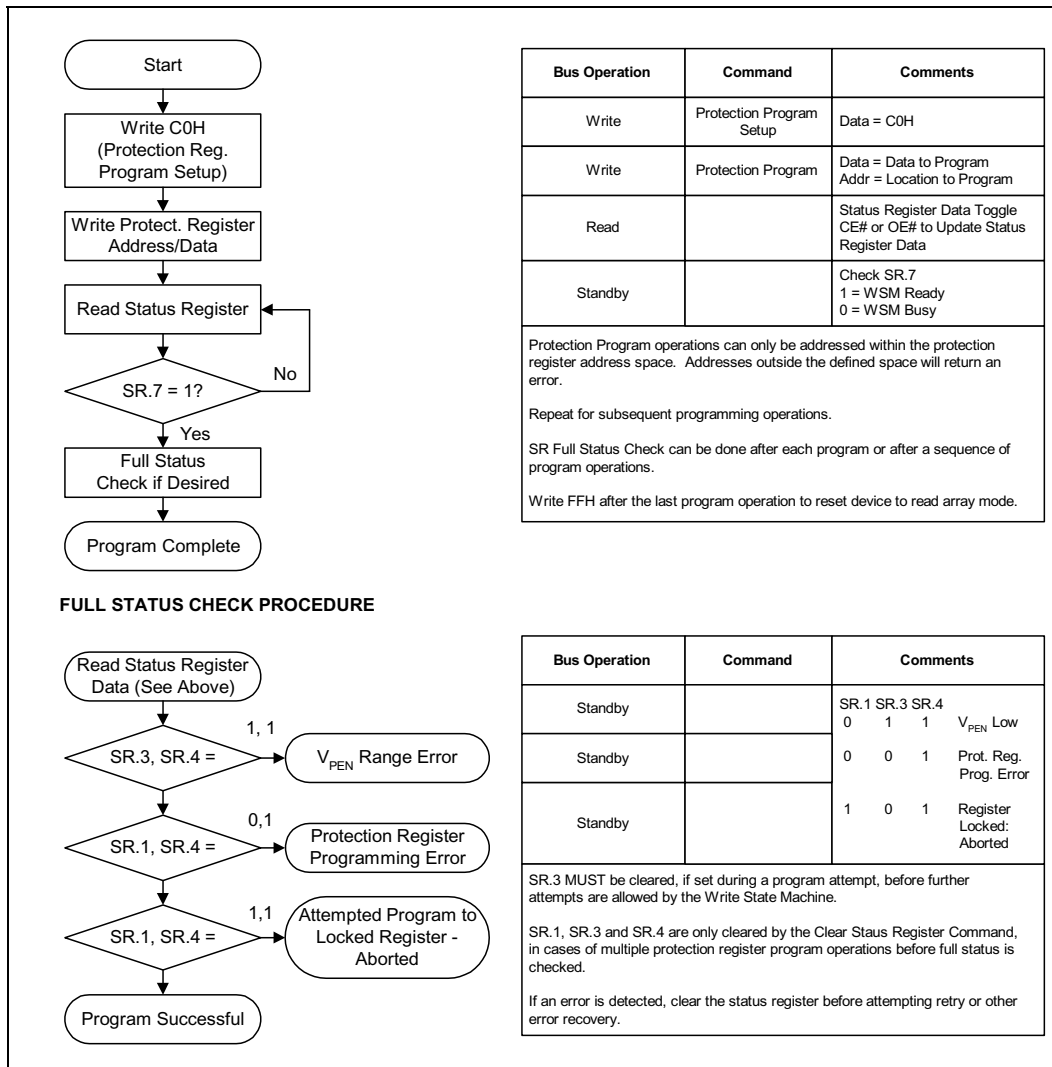

Appendix D Mechanical Information

Figure 21. 56-Lead TSOP Package Drawing and Specifications

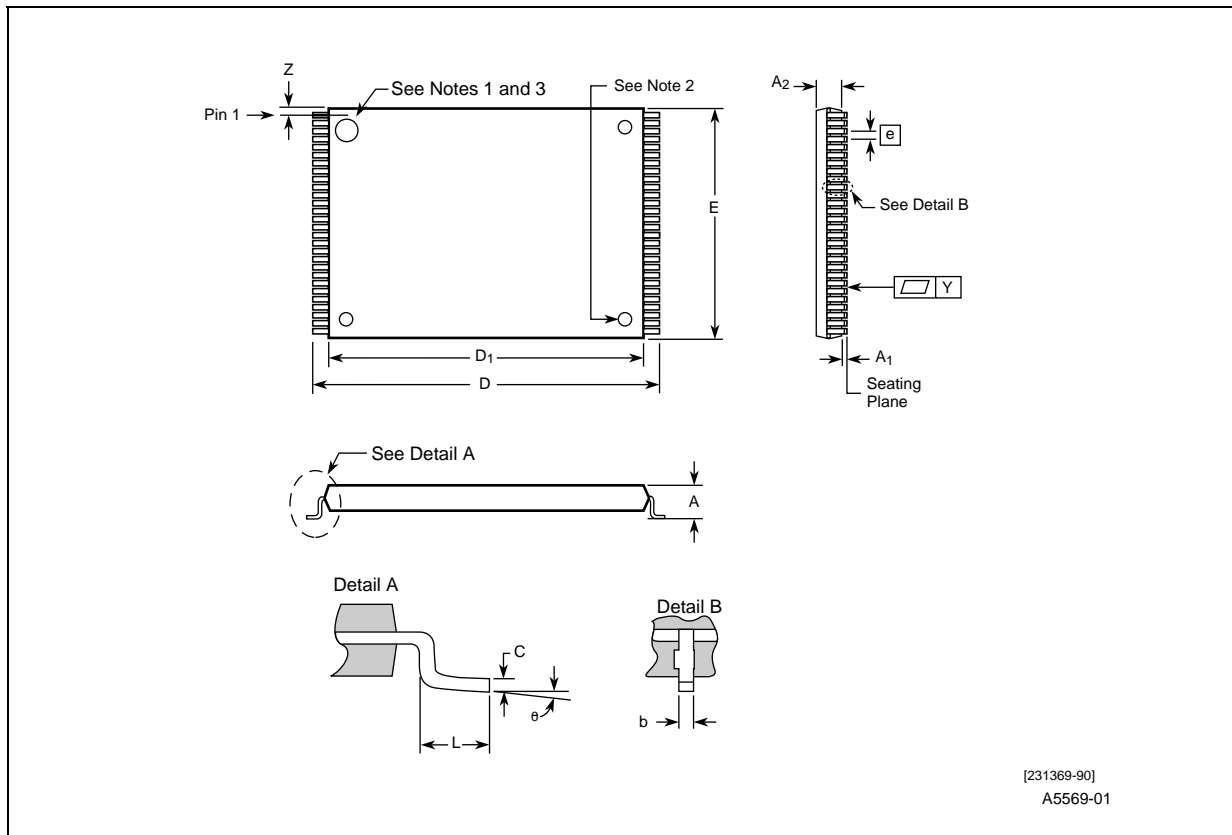


Table 30. 56-Lead TSOP Dimension Table

| | Sym | Millimeters | | | | Inches | | | |
|---------------------------|----------------|-------------|--------|--------|-------|--------|--------|-------|-------|
| | | Min | Nom | Max | Notes | Min | Nom | Max | Notes |
| Package Height | A | | | 1.200 | | | | 0.047 | |
| Standoff | A ₁ | 0.050 | | | | 0.002 | | | |
| Package Body Thickness | A ₂ | 0.965 | 0.995 | 1.025 | | 0.038 | 0.039 | 0.040 | |
| Lead Width | b | 0.100 | 0.150 | 0.200 | | 0.004 | 0.006 | 0.008 | |
| Lead Thickness | c | 0.100 | 0.150 | 0.200 | | 0.004 | 0.006 | 0.008 | |
| Package Body Length | D ₁ | 18.200 | 18.400 | 18.600 | 4 | 0.717 | 0.724 | 0.732 | 4 |
| Package Body Width | E | 13.800 | 14.000 | 14.200 | 4 | 0.543 | 0.551 | 0.559 | 4 |
| Lead Pitch | e | | 0.500 | | | | 0.0197 | | |
| Terminal Dimension | D | 19.800 | 20.00 | 20.200 | | 0.780 | 0.787 | 0.795 | |
| Lead Tip Length | L | 0.500 | 0.600 | 0.700 | | 0.020 | 0.024 | 0.028 | |
| Lead Count | N | | 56 | | | | 56 | | |
| Lead Tip Angle | ∅ | 0° | 3° | 5° | | 0° | 3° | 5° | |
| Seating Plane Coplanarity | Y | | | 0.100 | | | | 0.004 | |
| Lead to Package Offset | Z | 0.150 | 0.250 | 0.350 | | 0.006 | 0.010 | 0.014 | |

Figure 22. 3 Volt Intel StrataFlash® Memory Easy BGA Mechanical Specifications


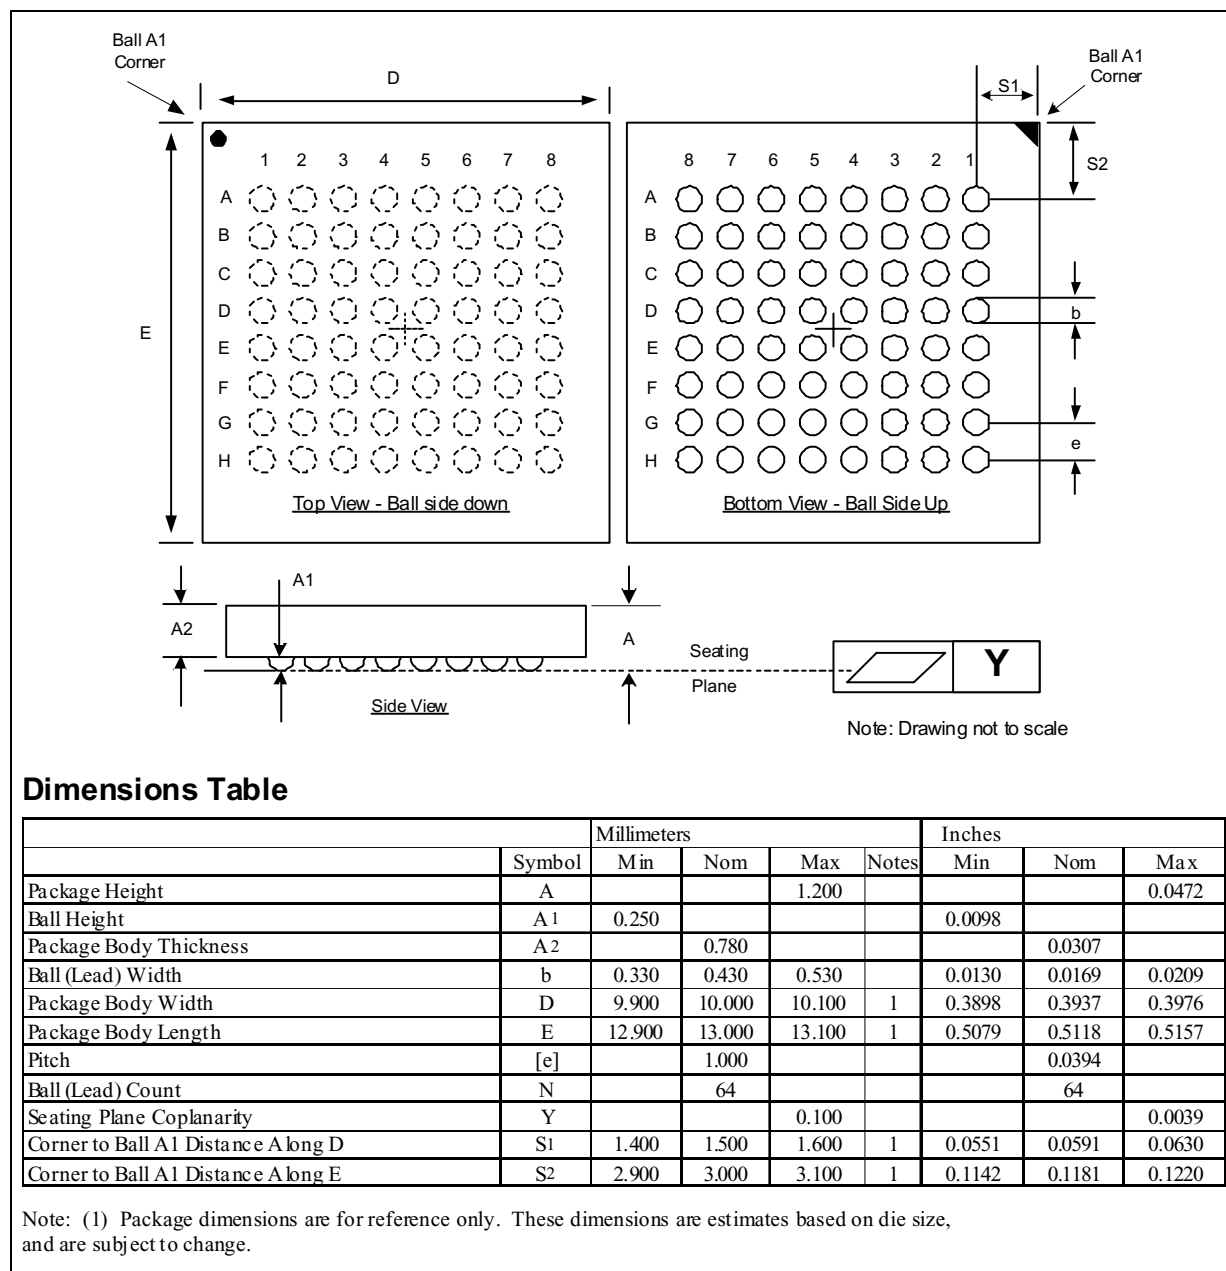


Figure 23. 3 Volt Intel StrataFlash® Memory VF BGA Mechanical Specifications

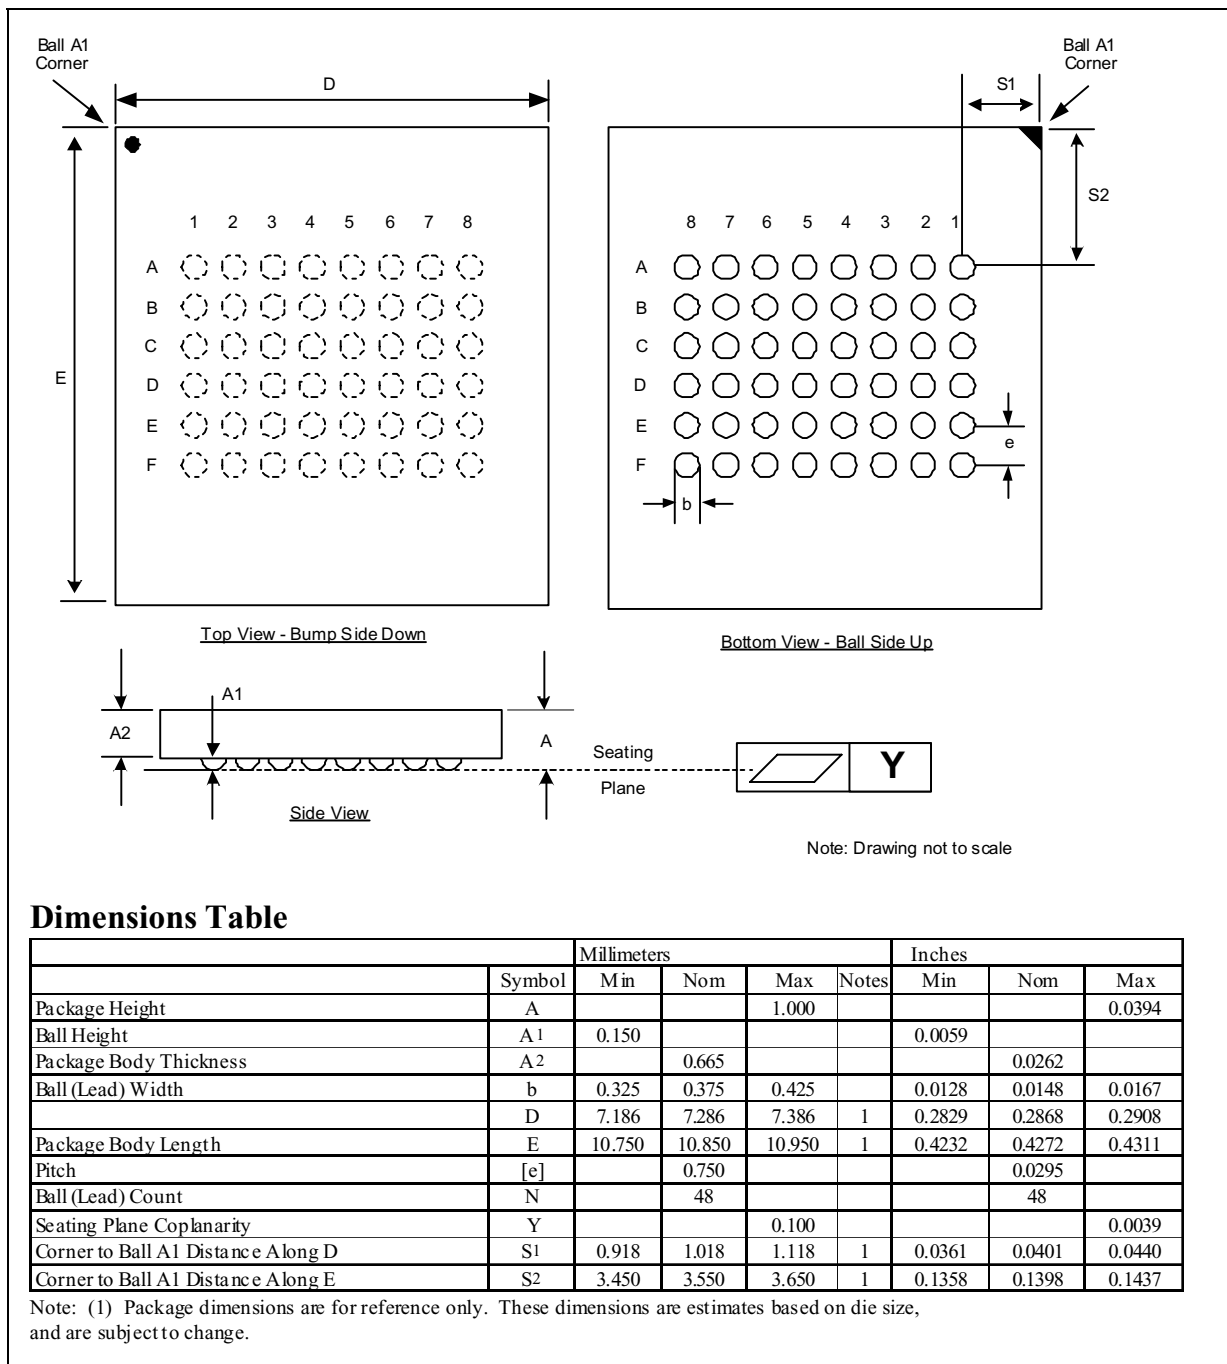

NOTES:

1. For Daisy Chain Evaluation Unit information refer to the Intel Flash Memory Packaging Technology Web page at; www.intel.com/design/packtech/index.htm
2. For Packaging Shipping Media information refer to the Intel Flash Memory Packaging Technology Web page at; www.intel.com/design/packtech/index.htm

Appendix E Design Considerations

E.1 Three-Line Output Control

The device will often be used in large memory arrays. Intel provides five control inputs (CE0, CE1, CE2, OE#, and RP#) to accommodate multiple memory connections. This control provides for:

- a. Lowest possible memory power dissipation.
- b. Complete assurance that data bus contention will not occur.

To use these control inputs efficiently, an address decoder should enable the device (see Table 3) while OE# should be connected to all memory devices and the system's READ# control line. This assures that only selected memory devices have active outputs while de-selected memory devices are in standby mode. RP# should be connected to the system POWERGOOD signal to prevent unintended writes during system power transitions. POWERGOOD should also toggle during system reset.

E.2 STS and Block Erase, Program, and Lock-Bit Configuration Polling

STS is an open drain output that should be connected to VCCQ by a pull-up resistor to provide a hardware method of detecting block erase, program, and lock-bit configuration completion. It is recommended that a 2.5k resistor be used between STS# and VCCQ. In default mode, it transitions low after block erase, program, or lock-bit configuration commands and returns to High Z when the WSM has finished executing the internal algorithm. For alternate configurations of the STS signal, see the Configuration command.

STS can be connected to an interrupt input of the system CPU or controller. It is active at all times. STS, in default mode, is also High Z when the device is in block erase suspend (with programming inactive), program suspend, or in reset/power-down mode.

E.3 Input Signal Transitions—Reducing Overshoots and Undershoots When Using Buffers or Transceivers

As faster, high-drive devices such as transceivers or buffers drive input signals to flash memory devices, overshoots and undershoots can sometimes cause input signals to exceed flash memory specifications. (See “Absolute Maximum Ratings” on page 33.) Many buffer/transceiver vendors now carry bus-interface devices with internal output-damping resistors or reduced-drive outputs. Internal output-damping resistors diminish the nominal output drive currents, while still leaving sufficient drive capability for most applications. These internal output-damping resistors help reduce unnecessary overshoots and undershoots. Transceivers or buffers with balanced- or light-drive outputs also reduce overshoots and undershoots by diminishing output-drive currents. When considering a buffer/transceiver interface design to flash, devices with internal output-damping resistors or reduced-drive outputs should be used to minimize overshoots and undershoots. For additional information, please refer to AP-647, *5 Volt Intel StrataFlash® Memory Design Guide* (Order Number: 292205).

E.4 V_{CC} , V_{PEN} , RP# Transitions

Block erase, program, and lock-bit configuration are not guaranteed if V_{PEN} or V_{CC} falls outside of the specified operating ranges, or $RP\# \neq V_{IH}$. If $RP\#$ transitions to V_{IL} during block erase, program, or lock-bit configuration, STS (in default mode) will remain low for a maximum time of $t_{PLPH} + t_{PHRH}$ until the reset operation is complete. Then, the operation will abort and the device will enter reset/power-down mode. The aborted operation may leave data partially corrupted after programming, or partially altered after an erase or lock-bit configuration. Therefore, block erase and lock-bit configuration commands must be repeated after normal operation is restored. Device power-off or $RP\# = V_{IL}$ clears the Status Register.

The CUI latches commands issued by system software and is not altered by V_{PEN} , CE_0 , CE_1 , or CE_2 transitions, or WSM actions. Its state is read array mode upon power-up, after exit from reset/power-down mode, or after V_{CC} transitions below V_{LKO} . V_{CC} must be kept at or above V_{PEN} during V_{CC} transitions.

After block erase, program, or lock-bit configuration, even after V_{PEN} transitions down to V_{PENLK} , the CUI must be placed in read array mode via the Read Array command if subsequent access to the memory array is desired. V_{PEN} must be kept at or below V_{CC} during V_{PEN} transitions.

E.5 Power Dissipation


When designing portable systems, designers must consider battery power consumption not only during device operation, but also for data retention during system idle time. Flash memory's nonvolatility increases usable battery life because data is retained when system power is removed.

Appendix F Additional Information

| Order Number | Document/Tool |
|--------------|--|
| 298130 | 3 Volt Intel® StrataFlash™ Memory 28F128J3, 28F640J3, 28F320J3 Specification Update |
| 298136 | Intel® Persistent Storage Manager (IPSM) User's Guide Software Manual |
| 297833 | Intel® Flash Data Integrator (FDI) User's Guide Software Manual |
| 290737 | 3 Volt Synchronous Intel StrataFlash® Memory 28F640K3, 28F640K18, 28F128K3, 28F128K18, 28F256K3, 28F256K18 |
| 292280 | AP-732 3 Volt Intel StrataFlash® Memory J3 to K3/K18 Migration Guide |
| 292237 | AP-689 Using Intel® Persistent Storage Manager |
| 290606 | 5 Volt Intel® StrataFlash™ Memory/28F320J5 and 28F640J5 datasheet |
| 290608 | 3 Volt FlashFile™ Memory; 28F160S3 and 28F320S3 datasheet |
| 290609 | 5 Volt FlashFile™ Memory; 28F160S5 and 28F320S5 datasheet |
| 290429 | 5 Volt FlashFile™ Memory; 28F008SA datasheet |
| 290598 | 3 Volt FlashFile™ Memory; 28F004S3, 28F008S3, 28F016S3 datasheet |
| 290597 | 5 Volt FlashFile™ Memory; 28F004S5, 28F008S5, 28F016S5 datasheet |
| 297859 | AP-677 Intel® StrataFlash™ Memory Technology |
| 292222 | AP-664 Designing Intel® StrataFlash™ Memory into Intel® Architecture |
| 292221 | AP-663 Using the Intel® StrataFlash™ Memory Write Buffer |
| 292218 | AP-660 Migration Guide to 3 Volt Intel® StrataFlash™ Memory |
| 292205 | AP-647 5 Volt Intel® StrataFlash™ Memory Design Guide |
| 292204 | AP-646 Common Flash Interface (CFI) and Command Sets |
| 292202 | AP-644 Migration Guide to 5 Volt Intel® StrataFlash™ Memory |
| 298161 | Intel® Flash Memory Chip Scale Package User's Guide |
| Note 4 | Preliminary Mechanical Specification for Easy BGA Package |

1. Please call the Intel Literature Center at (800) 548-4725 to request Intel documentation. International customers should contact their local Intel or distribution sales office.
2. Visit Intel's World Wide Web home page at <http://www.intel.com> for technical documentation and tools.
3. For the most current information on Intel StrataFlash memory, visit our website at <http://developer.intel.com/design/flash/isf>.
4. This document is available on the web at <http://developer.intel.com/design/flcomp/packdata/298049.htm>.

Appendix G Ordering Information

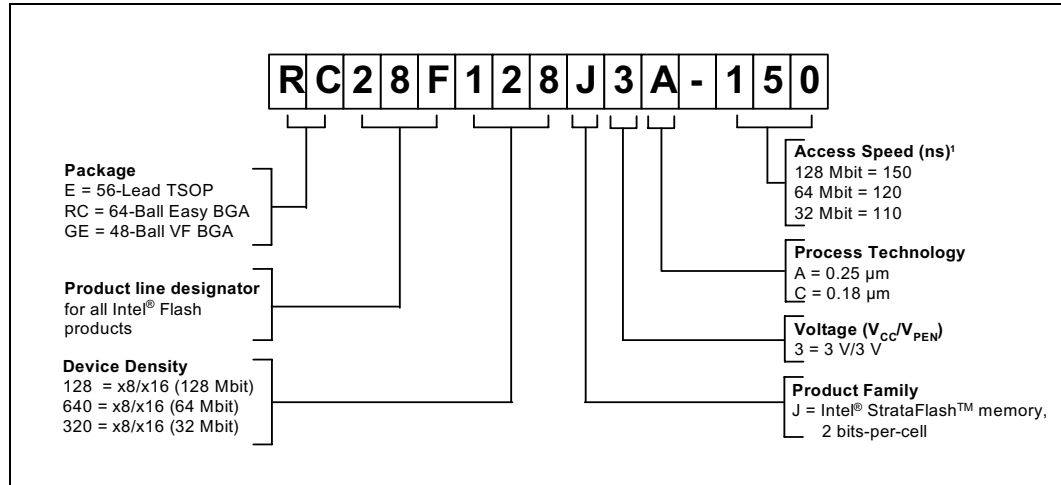

NOTE:

1. These speeds are for either the standard asynchronous read access times or for the first access of a page-mode read sequence.

VALID COMBINATIONS

| 56-Lead TSOP | 64-Ball Easy BGA | 48-Ball VF BGA |
|-------------------|--------------------|--------------------|
| E28F128J3A(C)-150 | RC28F128J3A(C)-150 | |
| E28F640J3A(C)-120 | RC28F640J3A(C)-120 | GE28F640J3C-120 |
| E28F320J3A(C)-110 | RC28F320J3A(C)-110 | GE28F320J3A(C)-110 |

